
Contact us: info@sub-equip.com
sales@sub-equip.com

China: Unit 201, Building 2, No. 8 Science and Technology Eighth Road, Xingtan Industrial ZoneQixing Community, Xingtan Town, Shunde District, Foshan City, Guangdong Province, China

Canada: 3794 Victoria Park Ave, Toronto. Ontario. M2H 3H7.

R290 Natural Refrigerant | SGS C US | SGS SANITATION | SGS ENERGY EFFICIENCY Efficacité Énergétique

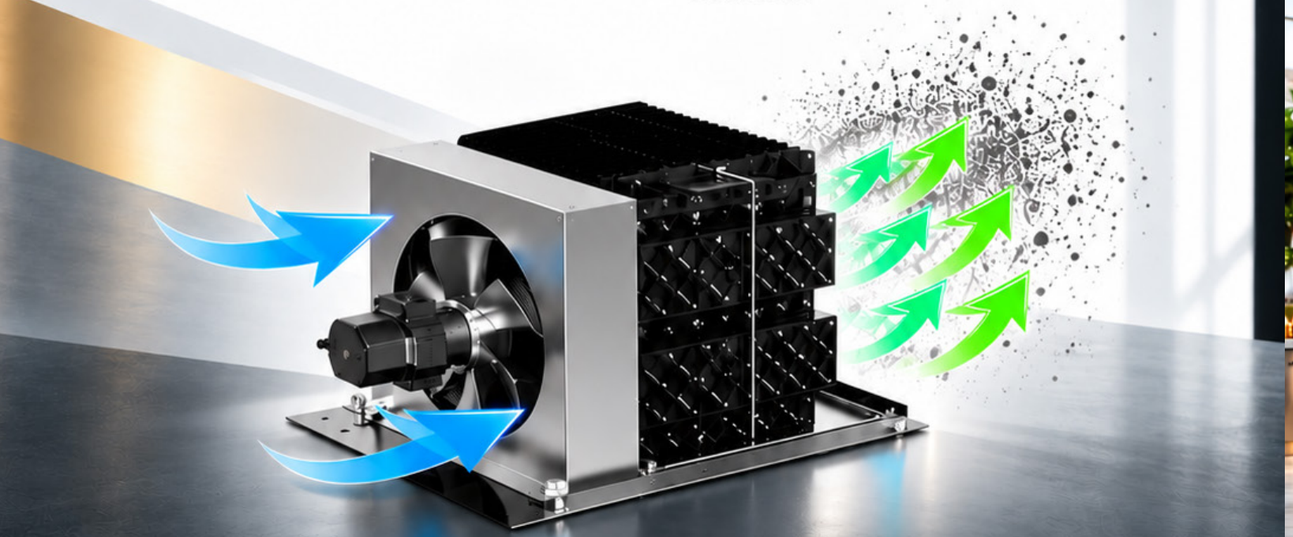

One integrated unit with self-cleaning capability delivers continuous high-efficiency air purification with minimal maintenance and reduced labor requirements.

For a wider selection of products, kindly explore our website at: **www.sub-equip.com**

If the data and structure update, without notice, subject to material object.

Sub-equip

www.sub-equip.com

PRODUCT CATALOG

COMMERCIAL REFRIGERATION



RELIABLE PERFORMANCE | DURABILITY | ENERGY EFFICIENCY | COMPLETE SOLUTIONS

www.sub-equip.com

Our Mission:

To deliver high-performance refrigeration solutions that ensure the freshness, safety, and quality of stored products for the foodservice industry.
Sub-Equip Refrigeration is dedicated to providing energy-efficient, durable, and innovative refrigeration systems tailored to meet the evolving needs of our customers while maintaining exceptional service and support.

Our Vision:

To become a global leader in refrigeration technology by setting new standards in efficiency,reliability and sustainability.
Sub-Equip Refrigeration strives to empower foodservice professionals with advanced refrigeration solutions that enhance their operations and contribute to a more sustainable future.



CERTIFICATE OF COMPLIANCE

Certificate Number: SGSNA/22/SD/00021

Contract Number: 802686
Certificate Project Number: SD-CERT220802956

Certified Product: Refrigerator
Trademarks: -
Model(s): See Page 2

Technical Data: 115 VAC, 60 Hz, 6.0 A

Certificate Holder: Foshan Jiaxuan Electrical Appliance Co., Ltd.
Building 2, 2nd Floor, No. 8 Keji 8th Road, Xinglan Industrial Zone, Qixing Community, Xinglan Town, Shunde District, Foshan, 528300, Guangdong, China

This certificate supersedes previous certificates issued with the same certificate number. Certification is valid when products are indicated on the SGS directory of certified products at www.sgs.com or using the QR code below. The product is certified according to ISO/IEC Guide 17067, Conformity assessment - Fundamentals of product certification, Control #, and in accordance with:

UL 471, 10th Ed, Rev. Sep. 12, 2019
CSA C22.2 No. 120-13, Dated Mar. 2013

Authorized by: Jason Wei
Jason Wei
Certifier

Effective date: 08 November 2022

Page 1 of 2

Certification Body

Connectivity & Products, a division of SGS North America Inc.
620 Old Peachtree Road, Ste. 100, Suwanee, GA 30024, USA
t: +1 770 232 0663 - +1 770 277 1240 www.sgs.com

Conforms to UL Standard 471
Certified to CSA Standard C22.2 No. 120



CERTIFICATE OF COMPLIANCE

Certificate Number: SGSNA/24/GZ/00140

Contract Number: 802686
Certificate Project Number: GZ-CERT240300925

Certified Product: Refrigerator
Trademarks: -
Model(s): See page 2
Technical Data: See page 2

Certificate Holder: Foshan Jiaxuan Electrical Appliance Co., Ltd.
Building 2, 2nd Floor, No. 8 Keji 8th Road, Xinglan Industrial Zone, Qixing Community, Xinglan Town, Shunde District, Foshan, 528300, Guangdong, China

This certificate supersedes previous certificates issued with the same certificate number. Certification is valid when products are indicated on the SGS directory of certified products at www.sgs.com or using the QR code below. The product is certified according to ISO/IEC Guide 17067, Conformity assessment - Fundamentals of product certification, Control #, and in accordance with:

NSF/ANSI 7 -2023

Authorized by: Jason Wei
Jason Wei
Certifier

Effective date: 13 June 2024

Page 1 of 2

Certification Body

Connectivity & Products, a division of SGS North America Inc.
620 Old Peachtree Road, Ste. 100, Suwanee, GA 30024, USA
t: +1 770 570 1800 f: +1 770 277 1240 www.sgs.com

Certified to NSF / ANSI 7

ABOUT US

www.sub-equip.com

Foshan Jiaxuan Electrical Appliances Co., Ltd. specializes in the design, manufacturing, and distribution of commercial refrigeration and temperature control equipment. With advanced technology, industry expertise, and a commitment to innovation, we deliver reliable, high-quality refrigeration solutions for the global foodservice industry.

OUR MAIN PRODUCTS INCLUDE:

Commercial Refrigeration: Refrigerated worktables, prep tables, reach-in refrigerators, and freezers.

Display Refrigeration: Glass-door merchandisers, open-air display cases, grab-and-go refrigerators, and cake showcases.

Specialty Refrigeration: Beer coolers, pizza prep tables, dry-aging cabinets, and blast freezers.

Refrigeration Systems: Commercial cooling and freezing units and customized temperature-control solutions.

Committed to quality and innovation, we provide dependable, energy-efficient refrigeration equipment designed for professional use.

ABOUT OUR BRAND: SUB-EQUIP

Designed in Canada. Manufactured in China.

Established in Canada in 2018, Sub-Equip is the exclusive commercial refrigeration brand of Foshan Jiaxuan Electrical Appliances Co., Ltd.

Combining Canadian market expertise with advanced manufacturing capabilities, Sub-Equip delivers reliable, high-performance refrigeration equipment designed to meet the demands of commercial kitchens and foodservice businesses.

Our products are developed with a strong focus on quality, safety, sanitation, and energy efficiency, with applicable certifications to meet North American industry standards.

SUB-EQUIP — ENGINEERED FOR PERFORMANCE. BUILT FOR RELIABILITY.



CONTENTS

BLACK SLIDING GLASS DOOR MERCHANDISER REFRIGERATOR	2
BLACK SWING GLASS DOOR MERCHANDISER REFRIGERATOR	3
BLACK SWING GLASS DOOR MERCHANDISER FREEZER	4
SLIDING GLASS DOOR REFRIGERATED MERCHANDISER	5
PASS THROUGH GLASS DOOR REFRIGERATED MERCHANDISER	6
PASS THROUGH REFRIGERATOR	7-8
STAINLESS STEEL GLASS DOOR REACH-IN REFRIGERATION	9-12
STAINLESS STEEL SOLID DOOR REACH-IN REFRIGERATION	13-16
STAINLESS STEEL SOLID DOOR ROLL IN REFRIGERATION	17-18
DRY AGING REFRIGERATOR	19-20
BLAST CHILLER/FREEZER	21-22
CHEF BASE	23-24
UNDERCOUNTER REFRIGERATION	25-30
BACK BAR REFRIGERATOR	31-33
BEER DISPENSER	34
SALAD & SANDWICH PRE TABLE	35-40
SALAD & SANDWICH PRE TABLE WITH SNEEZE GLASS REFRIGERATOR	41-42
SALAD & SANDWICH PRE TABLE WITH MABLE COUNTERTOP	43-44
MABLE COUNTERTOP REFRIGERATOR WITH 8 PCS SAUCE PANS	45
UNDERCOUNTER REFRIGERATOR WITH 8 PCS 1/6 SIZE PANS	46
PIZZA PRE TABLE REFRIGERATOR	47-48
WORKSTATION REFRIGERATOR	49-50
GRAB N GO REFRIGERATOR	51-52
GRAG N GO REFRIGERATED AIR CURTAIN MERCHANDISER	53-54
CAKE DISPLAY SHOWCASE	55-56
SUSHI DISPLAY SHOWCASE	57-60

www.sub-equip.com

MERCHANDISING GLASS DOOR REFRIGERATION



Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Black powder-coated steel
- LED interior lighting to enhance product display
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- Three door freezer equiped with a 5-20p plug
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com

Black Sliding Glass Door Merchandiser Refrigerator

- 「DOE COMPLIANT」 「NRCan COMPLIANT」





- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CDM-B36SR	Refrigerator 2 Doors	1003 × 756 × 2053 mm 39.49 × 29.76 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	170 kg 374 lbs	196 kg 431 lbs	1063 x 890 x 2253 mm 41.88 × 35.04 × 88.75"
CDM-B42SR	Refrigerator 2 Doors	1220 × 756 × 2053 mm 48.03 × 29.76 × 80.83"	8	115/60/1	7	700W 0.95 HP	5-15P	198 kg 436 lbs	235 kg 517 lbs	1280 x 890 x 2253 mm 50.50 × 35.04 × 88.75"
CDM-B48SR	Refrigerator 2 Doors	1370 × 756 × 2053 mm 53.94 × 29.76 × 80.83"	8	115/60/1	8.5	900W 1.22 HP	5-15P	217 kg 487 lbs	251 kg 553 lbs	1430 x 890 x 2253 mm 56.30 × 35.04 × 88.75"
CDM-B72SR	Refrigerator 3 Doors	2050 × 756 × 2053 mm 80.71 × 29.76 × 80.83"	12	115/60/1	8.5	900W 1.22 HP	5-15P	286 kg 630 lbs	338 kg 745 lbs	2110 x 890 x 2253 mm 83.00 × 35.04 × 88.75"

Black Swing Glass Door Merchandiser Refrigerator

- 「DOE COMPLIANT」 「NRCan COMPLIANT」




- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CDM-B12R	Refrigerator 1 Door	635 x 660 x 1625 mm 25" x 26" x 64"	3	115/60 /1	4.5	450 W 0.61 HP	5-15P	109 kg 240 lbs	123 kg 271 lbs	635 x 755 x 1815 mm 25.00 x 26.25 x 71.5"
CDM-B13R	Refrigerator 1 Door	575 x 605 x 2053 mm 22.64 × 23.82 × 80.83"	4	115/60 /1	4.5	450 W 0.61 HP	5-15P	125 kg 275 lbs	126 kg 319 lbs	635 x 665 x 2253 mm 25.00 x 26.25 x 88.75"
CDM-B16R	Refrigerator 1 Door	635 x 660 x 2053 mm 25.00 × 25.98 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	135 kg 297 lbs	155 kg 341 lbs	695 x 720 x 2253 mm 27.50 x 28.38 x 88.75"
CDM-B23R	Refrigerator 1 Door	680 x 805 x 2053 mm 26.77 × 31.69 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	140 kg 308 lbs	160 kg 352 lbs	740 x 890 x 2253 mm 29.25 x 35.00 x 88.75"
CDM-B36R	Refrigerator 2 Doors	1003 x 805 x 2053 mm 39.49 × 31.69 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	184 kg 404 lbs	221 kg 487lbs	1070 x 890 x 2253 mm 42.13 x 35.00 x 88.75"
CDM-B42R	Refrigerator 2 Doors	1220 x 805 x 2053 mm 48.03 × 31.69 × 80.83"	8	115/60/1	7	700W 0.95 HP	5-15P	210 kg 462 lbs	250 kg 550 lbs	1280 x 890 x 2253 mm 50.50 x 35.00 x 88.75"
CDM-B48R	Refrigerator 2 Doors	1370 x 805 x 2053 mm 53.94 × 31.69 × 80.83"	8	115/60/1	8.5	900W 1.22 HP	5-15P	225 kg 496 lbs	253 kg 557 lbs	1430 x 890 x 2253 mm 56.38 x 35.00 x 88.75"
CDM-B72R	Refrigerator 3 Doors	2050 x 805 x 2053 mm 80.71 × 31.69 × 80.83"	12	115/60/1	8.5	900W 1.22 HP	5-15P	310 kg 683 lbs	341kg 751 lbs	2110 x 890 x 2253 mm 83.00 x 35.00 x 88.75"

www.sub-equip.com

Black Swing Glass Door Merchandiser Freezer

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

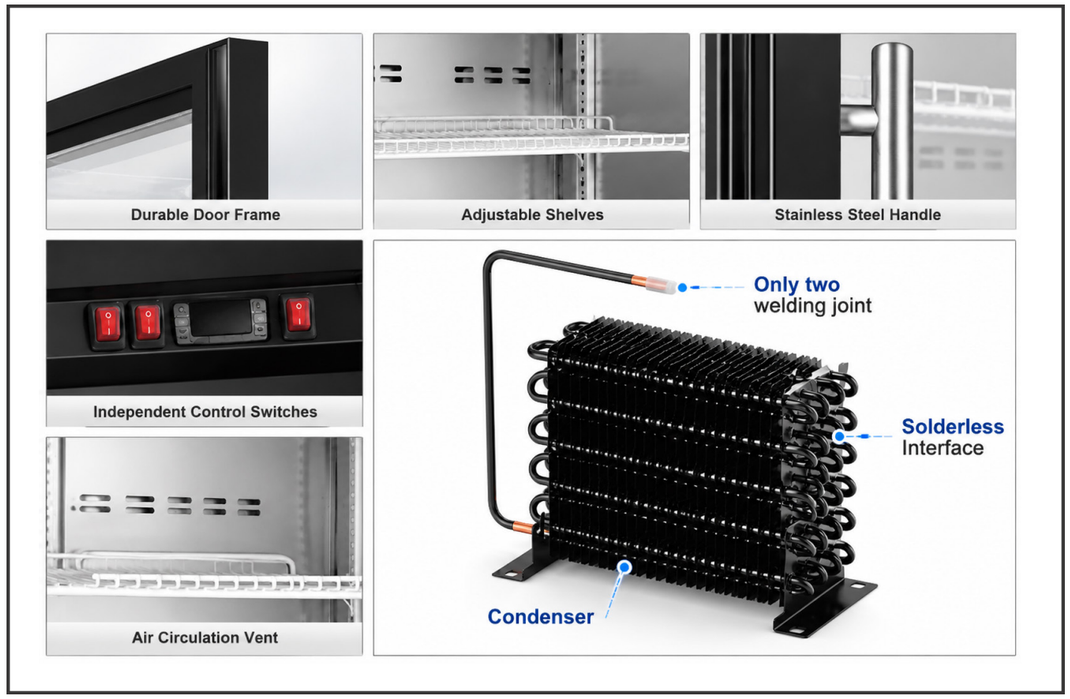

- Interior temperature range: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CDM-B13F	Freezer 1 Door	575 x 605 x 2053 mm 22.64 × 23.82 × 80.83"	4	115/60 /1	4.5	450 W 0.61 HP	5-15P	125 kg 275 lbs	145 kg 319 lbs	635 x 665 x 2253 mm 25.00 x 26.25 x 88.75"
CDM-B16F	Freezer 1 Door	635 x 660 x 2053 mm 25.00 × 25.98 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	135 kg 297 lbs	152 kg 335 lbs	695 x 720 x 2253 mm 27.50 x 28.38 x 88.75"
CDM-B23F	Freezer 1 Door	680 x 805 x 2053 mm 26.77 × 31.69 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	140 kg 308 lbs	164 kg 361 lbs	740 x 890 x 2253 mm 29.25 x 35.00 x 88.75"
CDM-B36F	Freezer 2 Doors	1003 x 805 x 2053 mm 39.49 × 31.69 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	184 kg 405 lbs	216 kg 475 lbs	1070 x 890 x 2253 mm 42.13 x 35.00 x 88.75"
CDM-B42F	Freezer 2 Doors	1220 x 805 x 2053 mm 48.03 × 31.69 × 80.83"	8	115/60/1	7	700W 0.95 HP	5-15P	210 kg 462 lbs	250 kg 550 lbs	1280 x 890 x 2253 mm 50.50 x 35.00 x 88.75"
CDM-B48F	Freezer 2 Doors	1370 x 805 x 2053 mm 53.94 × 31.69 × 80.83"	8	115/60/1	8.5	900W 1.22 HP	5-15P	226 kg 467 lbs	255 kg 562lbs	1430 x 890 x 2253 mm 56.38 x 35.00 x 88.75"
CDM-B72F	Freezer 3 Doors	2050 x 805 x 2053 mm 80.71 × 31.69 × 80.83"	12	115/60/1	12	1400W 1.9 HP	5-20P	320 kg 704lbs	360kg 792 lbs	2110 x 890 x 2253 mm 83.00 x 35.00 x 88.75"

Sliding Glass Door Refrigerated Merchandiser

- 「DOE COMPLIANT」 「NRCan COMPLIANT」





Features

- CFC-Free Refrigerant and Foam Insulation
- Electronic Thermostat with Digital LED Temperature Display for Accurate Control and Easy Reading
- Self-Closing Sliding Glass Doors
- Energy-Efficient Low-E Triple-Pane Glass Doors with Heated Glass and Door Frames
- Automatic Defrost and Condensate Evaporation
- Condensate Pan Efficiently Evaporates Excess Water
- Interior: White Powder-Coated Steel
- Exterior: Black Powder-Coated Steel
- LED Interior Lighting for Enhanced Product Display
- Adjustable, Heavy-Duty Epoxy-Coated Wire Shelves for Flexible Storage
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- R-290 Refrigerant
- Certification: SGS & SGS Sanitation Certified

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Exterior Dimensions (W x D x H)	Shelves	Ambient Temperature: 28°C / 82.4°F Amps	Power (W/HP)	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CDM-36SR-2239S	913 x 567 x 984 mm 36" x 22.3" x 38.7"	3	2.3	270 W 0.36 HP	5-15P	85.5 kg 188.5 lbs	97.5 kg 215 lbs	946 x 610 x 1180 mm 37.2" × 24.0" × 46.5"
CDM-36SR-2239B	913 x 567 x 984 mm 36" x 22.3" x 38.7"	3	2.3	270 W 0.36 HP	5-15P	85.5 kg 188.5 lbs	97.5 kg 215 lbs	946 x 610 x 1180 mm 37.2" × 24.0" × 46.5"
CDM-48SR-2455S	1220 x 610 x 1400 mm 48" x 24" x55.12"	3	2.3	290 W 0.39 HP	5-15P	135 kg 297.6 lbs	158 kg 348 lbs	1250 x 700 x 1600 mm 49.2" × 27.6" × 63.0"
CDM-48SR-2455B	1220 x 610 x 1400 mm 48" x 24" x55.12"	3	2.3	290 W 0.39 HP	5-15P	135 kg 297.6 lbs	158 kg 348 lbs	1250 x 700 x 1600 mm 49.2" × 27.6" × 63.0"

Pass-Through Glass Door Refrigerated Merchandiser




Features


- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Sliding Glass Doors
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- INTERIOR: White powder-coated steel, EXTERIOR: Black powder-coated steel/430 Stainless steel
- LED interior lighting to enhance product display
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- R-290 Refrigerant
- Certification: SGS & SGS Sanitation Certified
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Amps	Power	N.W	G.W	Packing Size (W x D x H)
CDM-40PT-3055B	4	1000 x 756 x 1400 mm 39.37" x 29.76" x 55.12"	2.6	290 W 0.39 HP	142 kg 313 lbs	172 kg 379 lbs	1030 x 845 x 1600 mm 40.6" × 33.3" × 63.0"
CDM-40PT-3055S	4	1000 x 756 x 1400 mm 39.37" x 29.76" x 55.12"	2.6	290 W 0.39 HP	142 kg 313 lbs	172 kg 379 lbs	1030 x 845 x 1600 mm 40.6" × 33.3" × 63.0"
CDM-48PT-3055B	4	1220 x 756 x 1400 mm 48" x 29.76" x 55.12"	2.5	290 W 0.39 HP	160 kg 352.4 lbs	193 kg 425.5 lbs	1250 x 845 x 1600 mm 49.2" × 33.3" × 63.0"
CDM-48PT-3055S	4	1220 x 756 x 1400 mm 48" x 29.76" x 55.12"	2.5	290 W 0.39 HP	160 kg 352.4 lbs	193 kg 425.5 lbs	1250 x 845 x 1600 mm 49.2" × 33.3" × 63.0"

Stainless Steel Glass Door Pass-Through Refrigerator

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

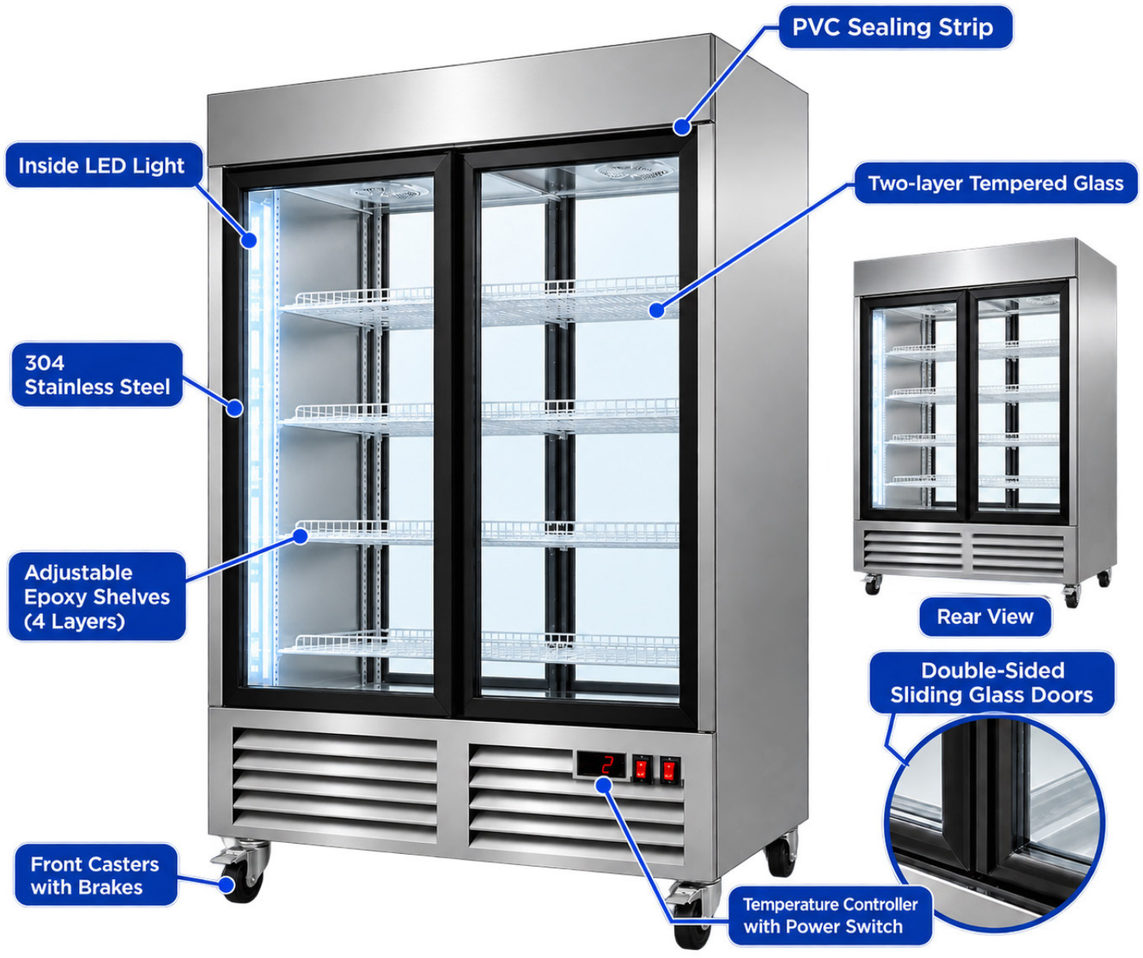


- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CDM-48RG	Refrigerator 4 Doors	1220 × 756 × 2053 mm 48.03 × 29.76 × 80.83"	8	115/60/1	7.5	800W 1.08 HP	5-15P	236 kg 520 lbs	265 kg 583 lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.74"

www.sub-equip.com

Stainless Steel Glass Door Pass-Through Refrigerator

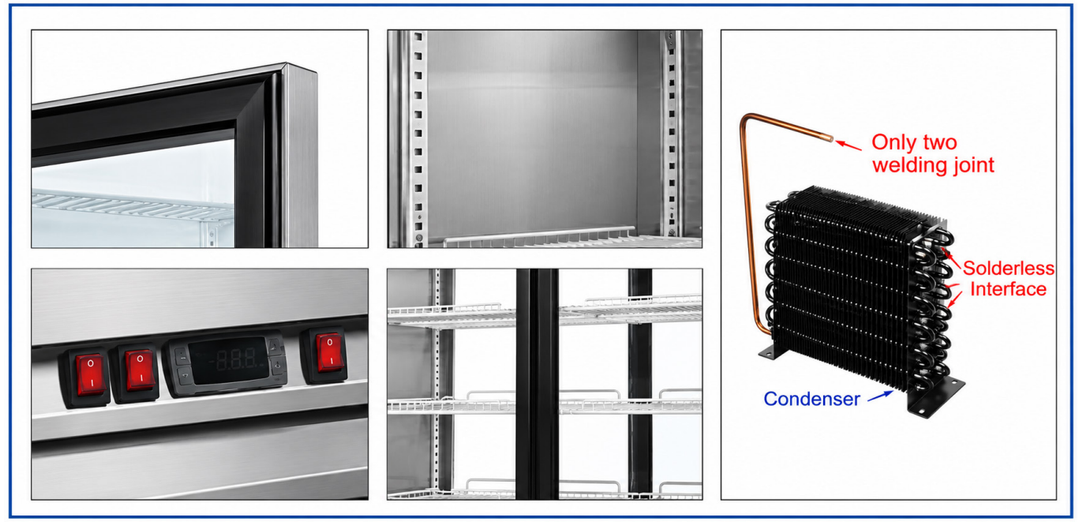

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
- INTERIOR: 304 stainless steel
- EXTERIOR: 430 stainless steel
- LED interior lighting to enhance product display
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com

GLASS DOOR REACH-IN REFRIGERATION
STAINLESS STEEL

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



www.sub-equip.com









Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
- INTERIOR: 304 stainless steel
- EXTERIOR: 430 stainless steel
- LED interior lighting to enhance product display
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- Three door freezer equiped with a 5-20p plug
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com

Stainless Steel Glass Door Reach-In Refrigerator

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-13RG	Refrigerator 1 Door	575 × 605 × 2053 mm 22.64 × 23.82 × 80.83"	4	115/60/1	4.5	450 W 0.61 HP	5-15P	125 kg 275 lbs	145 kg 319 lbs	635 × 665 × 2253 mm 25.00 × 26.18 × 88.75"
C-19RG	Refrigerator 1 Door	680 × 650 × 2053 mm 26.77 × 25.59 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	146 kg 321 lbs	166 kg 365 lbs	740 × 710 × 2253 mm 29.13 × 27.95 × 88.75"
C-27RG	Refrigerator 1 Door	680 × 810 × 2053 mm 26.77 × 31.89 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	155 kg 341 lbs	173 kg 381 lbs	740 × 890 × 2253 mm 29.13 × 35.04 × 88.75"
C-35RG	Refrigerator 2 Doors	1003 × 810 × 2053 mm 39.49 × 31.89 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	198 kg 436 lbs	235 kg 518 lbs	1063 × 890 × 2253 mm 41.85 × 35.04 × 88.75"
C-48RG	Refrigerator 2 Doors	1220 × 810 × 2053 mm 48.03 × 31.89 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	223 kg 491bs	260 kg 573 lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.75"
C-54RG	Refrigerator 2 Doors	1370 × 810 × 2053 mm 53.94 × 31.89 × 80.83"	8	115/60/1	8	850 W 1.15 HP	5-15P	272 kg 598 lbs	306 kg 673 lbs	1430 × 890 × 2253 mm 56.30 × 35.04 × 88.75"
C-81RG	Refrigerator 3 Doors	2050 × 810 × 2053 mm 80.71 × 31.89 × 80.83"	12	115/60/1	9	1000 W 1.36 HP	5-15P	358 kg 788 lbs	394 kg 867 lbs	2110 × 890 × 2253 mm 83.07 × 35.04 × 88.75"

Stainless Steel Glass Door Reach-In Freezer

- Interior temperature range: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-13FG	Freezer 1 Door	575 × 605 × 2053 mm 22.64 × 23.82 × 80.83"	4	115/60/1	4.5	450 W 0.61 HP	5-15P	125 kg 275 lbs	145 kg 319 lbs	635 × 665 × 2253 mm 25.00 × 26.18 × 88.75"
C-19FG	Freezer 1 Door	680 × 650 × 2053 mm 26.77 × 25.59 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	148 kg 326 lbs	168kg 370 lbs	740 × 710 × 2253 mm 29.13 × 27.95 × 88.75"
C-27FG	Freezer 1 Door	680 × 810 × 2053 mm 26.77 × 31.89 × 80.83"	4	115/60/1	5	550 W 0.75 HP	5-15P	155 kg 341 lbs	175 kg 385 lbs	740 × 890 × 2253 mm 29.13 × 35.04 × 88.75"
C-35FG	Freezer 2 Doors	1003 × 810 × 2053 mm 39.49 × 31.89 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	199 kg 438 lbs	236 kg 520 lbs	1063 × 890 × 2253 mm 41.85 × 35.04 × 88.75"
C-48FG	Freezer 2 Doors	1220 × 810 × 2053 mm 48.03 × 31.89 × 80.83"	8	115/60/1	7	700W 0.95 HP	5-15P	227 kg 500 lbs	265 kg 583 lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.75"
C-54FG	Freezer 2 Doors	1370 × 810 × 2053 mm 53.94 × 31.89 × 80.83"	8	115/60/1	8.5	900W 1.22 HP	5-15P	272 kg 598 lbs	306 kg 673 lbs	1430 × 890 × 2253 mm 56.30 × 35.04 × 88.75"
C-81FG	Freezer 3 Doors	2050 × 810 × 2053 mm 80.71 × 31.89 × 80.83"	12	115/60/1	12	1400 W 1.9 HP	5-20P	370 kg 815 lbs	428 kg 943 lbs	2110 × 890 × 2253 mm 83.07 × 35.04 × 88.75"

www.sub-equip.com

SOLID DOOR REACH-IN REFRIGERATION



Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
- INTERIOR: 304 stainless steel. EXTERIOR: 430 stainless steel
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- Three door freezer equiped with a 5-20p plug
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate

「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com



Stainless Steel Solid Door Reach-In Refrigerator

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-19BR	Refrigerator 1 Door	680 × 662 × 2053 mm 26.77 × 26.06 × 80.83"	4	115/60/1	5	500 W 0.68 HP	5-15P	128 kg 282 lbs	142 kg 312 lbs	740 × 720 × 2253 mm 29.13 × 28.35 × 88.74"
C-27BR	Refrigerator 1 Door	680 × 818 × 2053 mm 26.77 × 32.20 × 80.83"	4	115/60/1	5	500 W 0.68 HP	5-15P	132 kg 290 lbs	153 kg 337 lbs	740 × 890 × 2253 mm 29.13 × 35.04 × 88.74"
C-35BR	Refrigerator 2 Doors	1003 × 818 × 2053 mm 39.49 × 32.20 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	175 kg 385 lbs	207 kg 455 lbs	1063 × 890 × 2253 mm 41.85 × 35.04 × 88.74"
C-48BR	Refrigerator 2 Doors	1220 × 818 × 2053 mm 48.03 × 32.20 × 80.83"	8	115/60/1	7.5	800 W 1.09 HP	5-15P	189 kg 416 lbs	230kg 507 lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.74"
C-54BR	Refrigerator 2 Doors	1370 × 818 × 2053 mm 53.94 × 32.20 × 80.83"	8	115/60/1	7.5	800 W 1.09 HP	5-15P	226 kg 497 lbs	261 kg 575 lbs	1430 × 890 × 2253 mm 56.30 × 35.04 × 88.74"
C-81BR	Refrigerator 3 Doors	2050 × 818 × 2053 mm 80.71 × 32.20 × 80.83"	12	115/60/1	8.5	900W 1.22 HP	5-15P	318 kg 700 lbs	349 kg 768 lbs	2110 × 890 × 2253 mm 83.07 × 35.04 × 88.74"

Stainless Steel Solid Door Reach-In Freezer

- Interior temperature range: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-19BF	Freezer 1 Door	680 × 662 × 2053 mm 26.77 × 26.06 × 80.83"	4	115/60/1	5	500 W 0.68 HP	5-15P	124 kg 273 lbs	144kg 317 lbs	740 × 720 × 2253 mm 29.13 × 28.35 × 88.74"
C-27BF	Freezer 1 Door	680 × 818 × 2053 mm 26.77 × 32.20 × 80.83"	4	115/60/1	5	500 W 0.68 HP	5-15P	133 kg 293 lbs	154kg 339 lbs	740 × 890 × 2253 mm 29.13 × 35.04 × 88.74"
C-35BF	Freezer 2 Doors	1003 × 818 × 2053 mm 39.49 × 32.20 × 80.83"	8	115/60/1	6.5	650 W 0.88 HP	5-15P	176 kg 388 lbs	208kg 458lbs	1063 × 890 × 2253 mm 41.85 × 35.04 × 88.74"
C-48BF	Freezer 2 Doors	1220 × 818 × 2053 mm 48.03 × 32.20 × 80.83"	8	115/60/1	7.5	800 W 1.09 HP	5-15P	198 kg 436 lbs	239 kg 526lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.74"
C-54BF	Freezer 2 Doors	1370 × 818 × 2053 mm 53.94 × 32.20 × 80.83"	8	115/60/1	7.5	800 W 1.09 HP	5-15P	226 kg 497 lbs	262kg 577 lbs	1430 × 890 × 2253 mm 56.30 × 35.04 × 88.74"
C-81BF	Freezer 3 Doors	2050 × 818 × 2053 mm 80.71 × 32.20 × 80.83"	12	115/60/1	12	1400 W 1.9 HP	5-20P	343.5 kg 757 lbs	374 kg 824 lbs	2110 × 890 × 2253 mm 83.07 × 35.04 × 88.74"



www.sub-equip.com

Stainless Steel Solid Door Reach-In Freezer & Refrigerator





Features

- CFC free refrigerant and foam insulation.
- Equipped with two electronic thermostats and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-20P plug
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

• 「DOE COMPLIANT」 「NRCan COMPLIANT」

-Interior temperature range: Refrigerator: 1°C to 6°C (33°F to 46°F)
Freezer: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-48BR/BF	2 Doors	1220 × 818 × 2053 mm 48.03 × 32.2 × 80.83"	8	115/60/1	13.5	1280W 1.72 HP	5-20P	237 kg 523 lbs	270 kg 596 lbs	1280 × 890 × 2253 mm 50.39 × 35.04 × 88.74"

www.sub-equip.com

SOLID DOOR ROLL IN REFRIGERATION

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



- **Heavy-duty stainless steel construction**

304 stainless steel interior and 430 stainless steel exterior for durability, hygiene, and easy cleaning

- **Top-mounted refrigeration system**

Improves airflow performance and keeps refrigeration components away from floor-level debris

- **Digital temperature controller**

Precise, easy-to-read temperature adjustment and monitoring

- **Dual compressors for double-door refrigerator**

Independent refrigeration systems provide better temperature stability, faster recovery, and improved reliability.

- **18-tier stainless steel roll-in rack with casters included**

Rack dimensions: 20.5" W × 26.5" D × 62.5"H (520.8*670*1725 mm)

Designed to fit 18" × 26" (457*660 mm) sheet pans (sheet pans not included)

- **Floor ramps included**

Allows smooth and safe rolling of carts in and out without lifting

- **Environmentally friendly R290 hydrocarbon refrigerant**
- **SGS and SGS Sanitation certified for safety and sanitation**

www.sub-equip.com









Stainless Steel Solid Door Roll-In Refrigerator

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimension (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	N.W	G.W	Packing Size (W x D x H)
C-35BR-DN	1	889*876*2222 mm 35.0" × 34.5" × 87.5"	110/60/1	6	440 W 0.59 HP	174 kg 383.6 lb	198.9 kg 438.6 lb	939 x 926 x 2372 mm 37.0 × 36.5 × 93.4"
C-72BR-DN	2	1727*876*2222 mm 68.0" × 34.5" × 87.5"	110/60/1	10	810 W 1.09 HP	308.5 kg 680.2 lb	352.8 kg 777.8 lb	1777 x 926 x 2372 mm 69.9 × 36.5 × 93.4"

Stainless Steel Solid Door Roll-In Freezer


- Interior temperature range: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimension (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	N.W	G.W	Packing Size (W x D x H)
C-35BF-DN	1	889*876*2222 mm 35.0" × 34.5" × 87.5"	110/60/1	10	650 W 0.87 HP	183 kg 403.4 lb	207.9 kg 458.5 lb	939*926*2372 mm 37.0" × 36.5" × 93.4"
C-72BF-DN	2	1727*876*2222 mm 68.0" × 34.5" × 87.5"	110/60/1	16	1110 W 1.49 HP	323.5 kg 713.0 lb	367.8 kg 810.8 lb	1777*926*2372 mm 69.9" × 36.5" × 93.4"

www.sub-equip.com

DRY AGING REFRIGERATOR

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



For those who truly appreciate exceptional meat,
dry aging fridge is an absolute essential.
Whether aged for one week or several months, dry-aged meat
develops extraordinary tenderness and a rich, intense flavor,
delivering a premium dining experience every time.



Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
C-27RGN	Refrigerator 1 Glass Doors	680 × 810 × 2053 mm 26.77 × 31.89 × 80.83"	4	115/60/1	6.5	650 W 0.88 HP	5-15P	163 kg 359 lbs	183 kg 403 lbs	710 × 890 × 2253 mm 27.95 × 35.04 × 88.74"
C-54RGN	Refrigerator 2 Glass Doors	1370 × 810 × 2053 mm 53.94 × 31.89 × 80.83"	8	115/60/1	7.5	800W 1.08 HP	5-15P	272 kg 598 lbs	306 kg 673 lbs	1430 × 890 × 2253 mm 56.30 × 35.04 × 88.74"

www.sub-equip.com



Features

- This high valume dry aging cabinet can hold up to 200lbs of product each cabinet
- Equipped with a compressor fan cooling system & air purification.
- Energy efficient low-e triple pane glass doors
- UV sterilization lamp reduce bacterial
- Auto defrosting and auto evaporation to prevent condensation .
- Inset LED light to improve products visibility and display Interior construed from 304 stainless steel
- Exterior construed with 430 stainless steel
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Humidity range: 50 to 80%
- Humidification method: fan +water box
- Temperature : 36 to 57°F / 2 to 14°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate


- 「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com

BLAST CHILLER / FREEZER



Model	Doors	Exterior Dimensions (W x D x H)	Pans (GN 1/1) Not included	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBF-5	1 Door	838 x 920 x 1205 mm 33.00 x 36.25 x 47.50"	5	115/60/1	14	1600 W 2.2 HP	5-20P	115 kg 253 lbs	135 kg 299 lbs	898 x 980 x 1255 mm 35.50 x 38.75 x 49.50"
CBF-10	1 Door	838 x 920 x 1595 mm 33.00 x 36.25 x 62.75"	10	115 /60/1	24	2800W 3.8 HP	DUAL 5-20P	155 kg 341 lbs	185 kg 407 lbs	898 x 980 x 1645 mm 35.50 x 38.75 x 65.00"

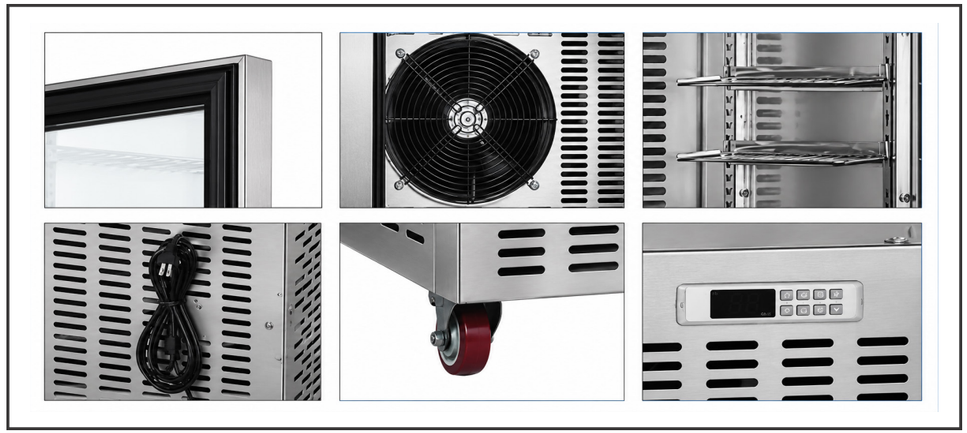



Blast Chiller: +70°C to +3°C in 90 Minutes
Rapid cooling from +70°C to +3°C (158°F to 37.4°F) in just 90 minutes, quickly passing through the bacterial danger zone (+65°C to +10°C / 149°F to 50°F) to prevent bacterial growth and ensure food safety.
After blast chilling, food can be safely stored for up to 8 days in a standard chiller, preserving freshness, quality, and taste.



Shock Freezer: +70°C to -18°C in ≤240 Minutes
Rapid freezing from +70°C to -18°C (158°F to 0°F) in under 240 minutes, forming microcrystals that protect food cell structure, locking in freshness, flavor, and nutrients.
After shock freezing, food can be stored safely for months in a standard freezer with minimal quality loss.

Features

- CFC Refrigerant and Foam
- Ventilated Refrigeration Compartment.
- Danfoss Refrigeration Components.
- Aspera Or Danfoss Compressor.
- Down to - 40°C (- 40°F)
- Exterior: Fully constructed with durable 430 Stainless Steel
- Internal: 304 Stainless Steel 304 With Round Internal Edges For Easy Cleaning
- Models are available to accommodate 5 full-size sheet pans (18″ x 26″)
- Self-Closing Doors with Easy to Clean
- Replace Magnetic Gasket.
- Precise Temperature Control: Mention the temperature range and its ability to maintain stable freezing conditions.
- 75mm thickness Insulation for Excellent Thermal Efficiency.
- Dixell Controller
- Electric Door Mullion Heater Replaceable
- SGS & SGS Sanitation Certificate.

www.sub-equip.com

CHEF BASE



Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- External 430 stainless steel.
- Internal: 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

www.sub-equip.com





Model	Drawers	Exterior Dimensions (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CCB-36-2D	2	965.2 × 800 × 653.5 mm 38.00 × 31.50 × 25.7"	115/60/1	3	300 W 0.41HP	5-15P	95 kg 210 lbs	125 kg 276 lbs	1037 x 945 x 853.5 mm 40.62 x 37.50 x 33.6"
CCB-48-2D	2	1270 × 800 × 653.5 mm 50.00 × 31.50 × 25.7"	115/60/1	5	500 W 0.68 HP	5-15P	115 kg 254 lbs	155 kg 342 lbs	1341 x 945 x 853.5 mm 52.62 x 37.50 x 33.6"
CCB-60-4D	4	1574.5 × 800 × 653.5 mm 61.99 × 31.50 × 25.7"	115/60/1	6.5	650 W 0.88 HP	5-15P	135 kg 298 lbs	180 kg 397 lbs	1645 x 945 x 853.5 mm 64.62 x 37.50 x 33.6"
CCB-72-4D	4	1879.6 × 800 × 653.5 mm 74.00 × 31.50 × 25.7"	115/60/1	6.5	650 W 0.88 HP	5-15P	150 kg 331 lbs	200 kg 441 lbs	1949 x 945 x 853.5 mm 76.62 x 37.50 x 33.6"
CCB-84-6D	6	2184.4 × 800 × 653.5 mm 86.00 × 31.50 × 25.7"	115/60/1	7.5	800 W 1.09 HP	5-15P	180 kg 397 lbs	230 kg 507 lbs	2253 x 945 x 853.5 mm 88.62 x 37.50 x 33.6"
CCB-96-6D	6	2489.2 × 800 × 653.5 mm 98.00 × 31.50 × 25.7"	115/60/1	7.5	800 W 1.09 HP	5-15P	200 kg 441 lbs	260 kg 574 lbs	2557 x 945 x 853.5 mm 100.62 x 37.50 x 33.6"

www.sub-equip.com

UNDERCOUNTER REFRIGERATION

- 「DOE COMPLIANT」 「NRCan COMPLIANT」








www.sub-equip.com




01 Stainless Steel Door
Durable and easy to clean



02 Adjustable Shelves
Heavy-duty epoxy-coated shelves



03 High-Efficiency Fan
Promotes uniform interior temperature




04 Digital Temperature Control
Electronic thermostat with LED display



05 Adjustable Shelf Support
Multiple height positions




06 Front Ventilation
Efficient heat dissipation



07 Stainless Steel Drawer
Smooth sliding, large capacity



08 Heavy-Duty Casters
4" casters (front with brakes)



09 High Performance Condenser
Durable structure for efficient cooling

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
- INTERIOR: 304 stainless steel
- EXTERIOR: 430 stainless steel
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate

- 「DOE COMPLIANT」 「NRCan COMPLIANT」














Undercounter Refrigerator

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUC-27	Refrigerator 1 Door	705 x 760 x 905 mm 27.75 x 30.00 x 35.62"	1	115/60/1	3	300 W 0.41HP	5-15P	64 kg 141 lbs	88 kg 194 lbs	816 x 855 x 990 mm 32.12 x 33.75 x 39.00"
CUC-29	Refrigerator 1 Door	734 x 760 x 905 mm 29.00 x 30.00 x 35.62"	1	115/60/1	3	300 W 0.41HP	5-15P	66 kg 146 lbs	91 kg 200 lbs	846 x 855 x 990 mm 33.38 x 33.75 x 39.00"
CUC-36	Refrigerator 2 Doors	920 x 760 x 905 mm 36.25 x 30.00 x 35.62"	2	115/60/1	3	300 W 0.41HP	5-15P	81.5 kg 179 lbs	114 kg 251 lbs	1001 x 855 x 990 mm 39.50 x 33.75 x 39.00"
CUC-48	Refrigerator 2 Doors	1225 x 760 x 905 mm 48.25 x 30.00 x 35.62"	2	115/60/1	4	400 W 0.54 HP	5-15P	85.5 kg 188 lbs	134 kg 295 lbs	1306 x 855 x 990 mm 51.50 x 33.75 x 39.00"
CUC-60	Refrigerator 2 Doors	1524 x 760 x 905 mm 60.00 x 30.00 x 35.62"	2	115/60/1	4	400 W 0.54 HP	5-15P	108 kg 238 lbs	157kg 346 lbs	1636 x 855 x 990 mm 64.50 x 33.75 x 39.00"
CUC-72	Refrigerator 3 Doors	1822 x 760 x 905 mm 71.75 x 30.00 x 35.62"	3	115/60/1	4.5	450 W 0.61 HP	5-15P	135 kg 297 lbs	180 kg 396 lbs	1904 x 855 x 990 mm 75.00 x 33.75 x 39.00"

Undercounter Freezer

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

- Interior temperature range: -22°C to -18°C (-7°F to 0°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUC-27F	Freezer 1 Door	705 x 760 x 905 mm 27.75 x 30.00 x 35.62"	1	115/60/1	3	300 W 0.41HP	5-15P	64 kg 141 lbs	88 kg 194 lbs	816 x 855 x 990 mm 32.12 x 33.75 x 39.00"
CUC-29F	Freezer 1 Door	734 x 760 x 905 mm 29.00 x 30.00 x 35.62"	1	115/60/1	3	300 W 0.41HP	5-15P	66 kg 146 lbs	91 kg 200 lbs	846 x 855 x 990 mm 33.38 x 33.75 x 39.00"
CUC-36F	Freezer 2 Doors	920 x 760 x 905 mm 36.25 x 30.00 x 35.62"	2	115/60/1	3	300 W 0.41HP	5-15P	81.5 kg 179 lbs	114 kg 251 lbs	1001 x 855 x 990 mm 39.50 x 33.75 x 39.00"
CUC-48F	Freezer 2 Doors	1225 x 760 x 905 mm 48.25 x 30.00 x 35.62"	2	115/60/1	4	400 W 0.54 HP	5-15P	85.5 kg 188 lbs	134 kg 295 lbs	1306 x 855 x 990 mm 51.50 x 33.75 x 39.00"
CUC-60F	Freezer 2 Doors	1524 x 760 x 905 mm 60.00 x 30.00 x 35.62"	2	115/60/1	5.5	550 W 0.75 HP	5-15P	108 kg 238 lbs	157kg 346 lbs	1636 x 855 x 990 mm 64.50 x 33.75 x 39.00"
CUC-72F	Freezer 3 Doors	1822 x 760 x 905 mm 71.75 x 30.00 x 35.62"	3	115/60/1	5.5	550 W 0.75 HP	5-15P	135 kg 297 lbs	180 kg 396 lbs	1904 x 855 x 990 mm 75.00 x 33.75 x 39.00"

UNDERCOUNTER REFRIGERATION

- 「DOE COMPLIANT」 「NRCan COMPLIANT」











www.sub-equip.com



Undercounter Refrigerator with side compressor

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUSC-48	Refrigerator 1 Door	1220 x 800 x 905 mm 48.00 x 31.50 x 35.62"	1	115/60/1	2.5	265 W 0.36 HP	5-15P	85 kg 188 lbs	128 kg 283 lbs	1304 x 895 x 995 mm 51.38 x 35.25 x 39.25"
CUSC-60	Refrigerator 2 Doors	1524 x 800 x 905 mm 60.00 x 31.50 x 35.62"	2	115/60/1	4	400 W 0.54 HP	5-15P	110 kg 243 lbs	128 kg 283 lbs	1614 x 895 x 995 mm 63.50 x 35.25 x 39.25"
CUSC-72	Refrigerator 2 Doors	1828 x 800 x 905 mm 72.00 x 31.50 x 35.62"	2	115/60/1	4.5	450 W 0.61 HP	5-15P	135 kg 297 lbs	185 kg 407 lbs	1915 x 895 x 995 mm 75.50 x 35.25 x 39.25"
CUSC-84	Refrigerator 3 Doors	2134 x 800 x 905 mm 84.00 x 31.50 x 35.62"	3	115/60/1	4.5	450 W 0.61 HP	5-15P	143 kg 315 lbs	209 kg 460 lbs	2224 x 895 x 995 mm 87.50 x 35.25 x 39.25"
CUSC-96	Refrigerator 3 Doors	2438 x 800 x 905 mm 96.00 x 31.50 x 35.62"	3	115/60/1	4.5	450 W 0.61 HP	5-15P	165 kg 363 lbs	225 kg 495 lbs	2528 x 895 x 995 mm 99.50 x 35.25 x 39.25"

Undercounter Freezer with side compressor

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUSC-48F	Freezer 1 Door	1220 x 800 x 905 mm 48.00 x 31.50 x 35.62"	1	115/60/1	2.5	265 W 0.36 HP	5-15P	85 kg 188 lbs	128 kg 283 lbs	1304 x 895 x 995 mm 51.38 x 35.25 x 39.25"
CUSC-60F	Freezer 2 Doors	1524 x 800 x 905 mm 60.00 x 31.50 x 35.62"	2	115/60/1	4.5	450 W 0.61 HP	5-15P	110 kg 243 lbs	128 kg 283 lbs	1614 x 895 x 995 mm 63.50 x 35.25 x 39.25"
CUSC-72F	Freezer 2 Doors	1828 x 800 x 905 mm 72.00 x 31.50 x 35.62"	2	115/60/1	5.5	550 W 0.75 HP	5-15P	135 kg 297 lbs	185 kg 407 lbs	1915 x 895 x 995 mm 75.50 x 35.25 x 39.25"
CUSC-84F	Freezer 3 Doors	2134 x 800 x 905 mm 84.00 x 31.50 x 35.62"	3	115/60/1	5.5	550 W 0.75 HP	5-15P	143 kg 315 lbs	209 kg 460 lbs	2224 x 895 x 995 mm 87.50 x 35.25 x 39.25"
CUSC-96F	Freezer 3 Doors	2438 x 800 x 905 mm 96.00 x 31.50 x 35.62"	3	115/60/1	5.5	550 W 0.75 HP	5-15P	165 kg 363 lbs	225 kg 495 lbs	2528 x 895 x 995 mm 99.50 x 35.25 x 39.25"

www.sub-equip.com

BACK BAR REFRIGERATOR



Features

- 1-1/2"thick stainless steel countertop with stainless steel interior and exterior
- LED interior lighting
- Doors have lock and key
- Adjustable, heavy-duty epoxy coated wire shelves (two per door)
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Easy to mount 5.6" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- R-290 refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」

Stainless steel solid door back bar refrigerator



Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBB27-48-2HS-S	2 Doors	1219 x 699 x 1057 mm 48 x 27.5 x 41.6"	4	115/60/1	4.5	450 W 0.61 HP	5-15P	108 kg 238 lbs	161 kg 354 lbs	1279 x 817 x 1260 50.35 × 32.17 × 49.61"
CBB27-60-2HS-S	2 Doors	1524 x 699 x 1057 mm 60 x 27.5 x 41.6"	4	115/60/1	5	500 W 0.68 HP	5-15P	120 kg 264 lbs	181 kg 399 lbs	1584 x 817 x 1260 62.36 × 32.17 × 49.61"
CBB27-72-3HS-S	3 Doors	1829 x 699 x 1057 mm 72 x 27.5 x 41.6"	6	115/60/1	5.5	600 W 0.81 HP	5-15P	138.5 kg 305 lbs	204 kg 449 lbs	1889 x 817 x 1260 74.37 × 32.17 × 49.61"

Stainless steel Glass door back bar refrigerator



Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBB27-48-2HG-S	2 Doors	1219 x 699 x 1057 mm 48 x 27.5 x 41.6"	4	115/60/1	4.5	500 W 0.68 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1260 50.35 × 32.17 × 49.61"
CBB27-60-2HG-S	2 Doors	1524 x 699 x 1057 mm 60 x 27.5 x 41.6"	4	115/60/1	5	550 W 0.75 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1260 62.36 × 32.17 × 49.61"
CBB27-72-3HG-S	3 Doors	1829 x 699 x 1057 mm 72 x 27.5 x 41.6"	6	115/60/1	5.5	700 W 0.94 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1260 74.37 × 32.17 × 49.61"

Stainless steel Glass door back bar refrigerator -Electroplated Exterior 「DOE COMPLIANT」 「NRCan COMPLIANT」





Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBB27-48-2HG-C	2 Doors	1219 x 699 x 1057 mm 48 x 27.5 x 41.6"	4	115/60/1	4.5	500 W 0.68 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1260 50.35 × 32.17 × 49.61"
CBB27-60-2HG-C	2 Doors	1524 x 699 x 1057 mm 60 x 27.5 x 41.6"	4	115/60/1	5	550 W 0.75 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1260 62.36 × 32.17 × 49.61"
CBB27-72-3HG-C	3 Doors	1829 x 699 x 1057 mm 72 x 27.5 x 41.6"	6	115/60/1	5.5	700 W 0.94 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1260 74.37 × 32.17 × 49.61"

Stainless steel Black door back bar refrigerator -Swing/Sliding Doors 「DOE COMPLIANT」 「NRCan COMPLIANT」







Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBB27-48-2HG-B	2 Doors	1219 x 699 x 1057 mm 48 x 27.5 x 41.6"	4	115/60/1	4.5	500 W 0.68 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1260 50.35 × 32.17 × 49.61"
CBB27-60-2HG-B	2 Doors	1524 x 699 x 1057 mm 60 x 27.5 x 41.6"	4	115/60/1	5	550 W 0.75 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1260 62.36 × 32.17 × 49.61"
CBB27-72-3HG-B	3 Doors	1829 x 699 x 1057 mm 72 x 27.5 x 41.6"	6	115/60/1	5.5	700 W 0.94 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1260 74.37 × 32.17 × 49.61"
CBB27-48-2SD-B	2 Doors	1219 x 699 x 1057 mm 48 x 27.5 x 41.6"	4	115/60/1	4.5	500 W 0.68 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1260 50.35 × 32.17 × 49.61"
CBB27-60-2SD-B	2 Doors	1524 x 699 x 1057 mm 60 x 27.5 x 41.6"	4	115/60/1	5	550 W 0.75 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1260 62.36 × 32.17 × 49.61"
CBB27-72-3SD-B	3 Doors	1829 x 699 x 1057 mm 72 x 27.5 x 41.6"	6	115/60/1	5.5	700 W 0.94 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1260 74.37 × 32.17 × 49.61

www.sub-equip.com

BEER DISPENSER

- 「DOE COMPLIANT」 「NRCan COMPLIANT」







Features

- 1-1/2"thick stainless steel countertop with stainless steel interior and exterior
- Removable Stainless Steel Beer Drip Tray: Countertop-mounted stainless steel drip tray can be easily removed for cleaning and maintenance.
- Built-in door locks provide added security.
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Easy to mount 5.6" casters (front casters with brakes) are standard with all units
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	Exterior Dimensions (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CBD1-48B	1	1219 x 699 x 1415.2 mm 48 x 27.5 x 55.72"	115/60/1	4.5	450 W 0.61 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1240 mm 50.35 × 32.17 × 48.9"
CCB2-60B	2	1524 x 699 x 1415.2 mm 60 x 27.5 x 55.72"	115/60/1	5	500 W 0.68 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1240 mm 62.36 × 32.17 × 48.9"
CBD3-72B	3	1829 x 699 x 1415.2 mm 72 x 27.5 x 55.72"	115/60/1	5.5	600 W 0.8 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1240 mm 74.37 × 32.17 × 48.9"
CBD1-48S	1	1219 x 699 x 1415.2 mm 48 x 27.5 x 55.72"	115/60/1	4.5	450 W 0.61 HP	5-15P	122.5 kg 269 lbs	175 kg 385 lbs	1279 x 817 x 1240 mm 50.35 × 32.17 × 48.9"
CCB2-60S	2	1524 x 699 x 1415.2 mm 60 x 27.5 x 55.72"	115/60/1	5	500 W 0.68 HP	5-15P	138.5 kg 305 lbs	199 kg 438 lbs	1584 x 817 x 1240 mm 62.36 × 32.17 × 48.9"
CBD3-72S	3	1829 x 699 x 1415.2 mm 72 x 27.5 x 55.72"	115/60/1	5.5	600 W 0.8 HP	5-15P	161.5 kg 356 lbs	229 kg 504 lbs	1889 x 817 x 1240 mm 74.37 × 32.17 × 48.9"

www.sub-equip.com

SALAD & SANDWICH PRE TABLE REFRIGERATOR

- 「DOE COMPLIANT」 「NRCan COMPLIANT」





www.sub-equip.com




Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Swing Door
- Magnetic gasket can be replaced without any tools
- External: 430 Stainless Steel framework construction
- Internal: 304 Stainless Steel
- Auto defrosting and auto evaporation to prevent condensation
- The coated copper tube, with a robust 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, it has only two welding joints, reducing the risk of leaks
- Condensor sits inside the condensation pan efficiently evaporates excess water
- Adjustable, heavy-duty epoxy coated wire shelves
- 1/6 size Polycarbonate GN pan and plastic cutting board included
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate
- 「DOE COMPLIANT」 「NRCan COMPLIANT」







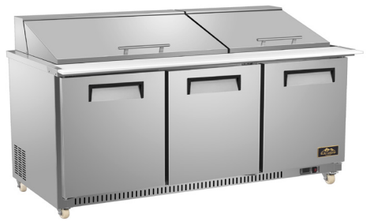




www.sub-equip.com

Salad & Sandwich Pre Table Refrigerator-Regular Top

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 279 mm (11")

Model	Doors	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CSSU-29	1 Door	8	736 x 812 x 905 or 1079 mm 29.00 x 32.00 x 35.62 or 42.50"	1	115/60/1	2.2	240 W 0.32HP	5-15P	70 kg 155 lbs	101 kg 223 lbs	816 x 855 x 1145 mm 32.12 x 33.50 x 45.00"
CSSU-36	2 Doors	10	920 x 812 x 905 or 1079 mm 36.25 x 32.00 x 35.62 or 42.50"	2	115/60/1	2.5	275 W 0.37HP	5-15P	79.5 kg 175 lbs	110 kg 243 lbs	1001 x 855 x 1145 mm 39.50 x 33.50 x 45.00"
CSSU-48	2 Doors	12	1227 x 812 x 905 or 1079 mm 48.25 x 32.00 x 35.62 or 42.50"	2	115/60/1	3.3	360 W 0.48 HP	5-15P	100 kg 220 lbs	130 kg 286 lbs	1306 x 855 x 1145 mm 51.50 x 33.50 x 45.00"
CSSU-60	2 Doors	16	1526 x 812 x 905 or 1079 mm 60.00 x 32.00 x 35.62 or 42.50"	2	115/60/1	4	440 W 0.59 HP	5-15P	119 kg 262 lbs	178 kg 392 lbs	1636 x 855 x 1145 mm 65.00 x 33.50 x 45.00"
CSSU-72	3 Doors	20	1824 x 812 x 905 or 1079 mm 71.88 x 32.00 x 35.62 or 42.50"	3	115/60/1	4	440 W 0.59 HP	5-15P	164 kg 360 lbs	206 kg 454 lbs	1904 x 855 x 1145 mm 75.00 x 33.50 x 45.00"

Salad & Sandwich Pre Table Refrigerator-Mega Top

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 228 mm (9")

Model	Doors	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CSSU-29M	1 Door	12	736 x 926 x 905 or 1117 mm 29.00 x 36.50 x 35.62 or 44.00"	1	115/60/1	2.2	240 W 0.32HP	5-15P	72 kg 158 lbs	111 kg 244 lbs	816 x 945 x 1210 mm 32.12 x 37.25 x 47.75"
CSSU-36M	2 Doors	15	920 x 926 x 905 or 1117 mm 36.25 x 36.50 x 35.62 or 44.00"	2	115/60/1	2.5	275 W 0.37HP	5-15P	79.5 kg 175 lbs	110 kg 243 lbs	1001 x 945 x 1210 mm 39.50 x 37.25 x 47.75"
CSSU-48M	2 Doors	18	1227 x 926 x 905 or 1117 mm 48.25 x 36.50 x 35.62 or 44.00"	2	115/60/1	3.3	360 W 0.48 HP	5-15P	100 kg 220 lbs	145 kg 319 lbs	1306 x 945 x 1210 mm 51.50 x 37.25 x 47.75"
CSSU-60M	2 Doors	24	1526 x 926 x 905 or 1117 mm 60.00 x 36.50 x 35.62 or 44.00"	2	115/60/1	4	440 W 0.59 HP	5-15P	143 kg 315 lbs	194kg 427 lbs	1636 x 945 x 1210 mm 65.00 x 37.25 x 47.75"
CSSU-72M	3 Doors	30	1824 x 926 x 905 or 1117 mm 71.88 x 36.50 x 35.62 or 44.00"	3	115/60/1	4	440 W 0.59 HP	5-15P	157kg 346 lbs	220 kg 485 lbs	1904 x 945 x 1210 mm 75.00 x 37.25 x 47.75"

Salad & Sandwich Pre Table Refrigerator
- Regular Top with side mounted compressor

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 279 mm (11")



Model	Doors	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUSC-48R	1 Door	12	1222 x 837 x 905 or 1079 mm 48.12 x 33.00 x 35.62 or 42.50"	1	115/60/1	2.7	290 W 0.39HP	5-15P	95 kg 209 lbs	135 kg 297 lbs	1304 x 910 x 1165 mm 51.50 x 36.00 x 45.50"
CUSC-60R	2 Doors	16	1526 x 837 x 905 or 1079 mm 60.00 x 33.00 x 35.62 or 42.50"	2	115/60/1	2.8	300 W 0.4 HP	5-15P	120 kg 264 lbs	160 kg 352 lbs	1614 x 910 x 1165 mm 63.50 x 36.00 x 45.50"
CUSC-72R	2 Doors	20	1830 x 837 x 905 or 1079 mm 72.00 x 33.00 x 35.62 or 42.50"	2	115/60/1	3.7	400 W 0.54 HP	5-15P	145 kg 319 lbs	190 kg 418 lbs	1919 x 910 x 1165 mm 75.50 x 36.00 x 45.50"
CUSC-84R	3 Doors	22	2136 x 837 x 905 or 1079 mm 84.00 x 33.00 x 35.62 or 42.50"	3	115/60/1	3.7	400 W 0.54 HP	5-15P	165 kg 363 lbs	205 kg 451 lbs	2224 x 910 x 1165 mm 87.50 x 36.00 x 45.50"
CUSC-96R	3 Doors	26	2440 x 837 x 905 or 1079 mm 96.00 x 33.00 x 35.62 or 42.50"	3	115/60/1	4.1	450 W 0.60 HP	5-15P	190 kg 418 lbs	230 kg 506 lbs	2528 x 910 x 1165 mm 99.50 x 36.00 x 45.50"

www.sub-equip.com













Salad & Sandwich Pre Table Refrigerator
- Mega Top with side mounted compressor

- 「DOE COMPLIANT」 「NRCan COMPLIANT」

- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 228 mm (9")



Model	Doors	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUSC-48M	1 Door	18	1222 x 926 x 905 or 1117 mm 48.12 x 36.50 x 35.62 or 44.00"	1	115/60/1	2.7	290 W 0.39HP	5-15P	105 kg 231 lbs	150 kg 330 lbs	1304 x 945 x 1210 mm 51.50 x 37.25 x 47.75"
CUSC-60M	2 Doors	24	1526 x 926 x 905 or 1117 mm 60.00 x 36.50 x 35.62 or 44.00"	2	115/60/1	2.8	300 W 0.4 HP	5-15P	130 kg 286 lbs	175 kg 385 lbs	1614 x 945 x 1210 mm 63.50 x 37.25 x 47.75"
CUSC-72M	2 Doors	30	1830 x 926 x 905 or 1117 mm 72.00 x 36.50 x 35.62 or 44.00"	2	115/60/1	3.7	400 W 0.54 HP	5-15P	155 kg 341 lbs	200 kg 440 lbs	1919 x 945 x 1210 mm 75.50 x 37.25 x 47.75"
CUSC-84M	3 Doors	33	2136 x 926 x 905 or 1117 mm 84.00 x 36.50 x 35.62 or 44.00"	3	115/60/1	3.7	400 W 0.54 HP	5-15P	175 kg 385 lbs	215 kg 473 lbs	2224 x 945 x 1210 mm 87.50 x 37.25 x 47.75"
CUSC-96M	3 Doors	39	2440 x 926 x 905 or 1117 mm 96.00 x 36.50 x 35.62 or 44.00"	3	115/60/1	4.1	450 W 0.60 HP	5-15P	200 kg 440 lbs	240 kg 528 lbs	2528 x 945 x 1210 mm 99.50 x 37.25 x 47.75"









www.sub-equip.com

SALAD & SANDWICH PRE TABLE WITH SNEEZE GLASS REFRIGERATOR



Features

- Built-in 19" high sneeze guard constructed from tempered glass on 3 sides with a stainless steel frame and flat top Comes with 1/6 size 4" deep pans and adapter bars, unit can accommodate pans that are 6" deep
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Drawers are designed to fit a standard full size 1/1 pan
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability. -Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and 8 5/8" plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.
- R-290 Refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 219 mm (8.6")

Model	Doors & Drawers	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	N.W	G.W	Packing Size (W x D x H)
CUSC-60G	2 Doors	24	1526 x 877 x 905 or 1387 mm 60.00 x 34.50 x 35.62 or 54.62"	4	115/60/1	4.5	500 W 0.68 HP	150 kg 331 lbs	215 kg 474 lbs	1610 x 905 x 1473 mm 63.50 x 35.62 x 58.00"
CUSC-60G-2D	1 Door & 2 Drawers	24	1526 x 877 x 905 or 1387 mm 60.00 x 34.50 x 35.62 or 54.62"	2	115/60/1	4.5	500 W 0.68 HP	165 kg 364 lbs	230 kg 507 lbs	1610 x 905 x 1473 mm 63.50 x 35.62 x 58.00"
CUSC-60G-4D	4 Drawers	24	1526 x 877 x 905 or 1387 mm 60.00 x 34.50 x 35.62 or 54.62"	0	115/60/1	4.5	500 W 0.68 HP	180 kg 397 lbs	245 kg 540 lbs	1610 x 905 x 1473 mm 63.50 x 35.62 x 58.00"
CUSC-72G	2 Doors	30	1830 x 877 x 905 or 1387 mm 72.00 x 34.50 x 35.62 or 54.62"	4	115/60/1	5	550 W 0.75 HP	195 kg 430 lbs	275 kg 607 lbs	1915 x 905 x 1473 mm 75.50 x 35.62 x 58.00"
CUSC-72G-2D	1 Doors & 2 Drawers	30	1830 x 877 x 905 or 1387 mm 72.00 x 34.50 x 35.62 or 54.62"	2	115/60/1	5	550 W 0.75 HP	210 kg 430 lbs	253 kg 577 lbs	1915 x 905 x 1473 mm 75.50 x 35.62 x 58.00"
CUSC-72G-4D	4 Drawers	30	1830 x 877 x 905 or 1387 mm 72.00 x 34.50 x 35.62 or 54.62"	0	115/60/1	5	550 W 0.75 HP	225 kg 496 lbs	275 kg 607 lbs	1915 x 905 x 1473 mm 75.50 x 35.62 x 58.00"
CUSC-84G	3 Doors	36	2136 x 877 x 905 or 1387 mm 84.00 x 34.50 x 35.62 or 54.62"	6	115/60/1	5.5	600 W 0.81 HP	210 kg 463 lbs	290 kg 640 lbs	2220 x 905 x 1473 mm 87.50 x 35.62 x 58.00"
CUSC-84G-2D	2 Doors & 2 Drawers	36	2136 x 877 x 905 or 1387 mm 84.00 x 34.50 x 35.62 or 54.62"	4	115/60/1	5.5	600 W 0.81 HP	240 kg 529 lbs	290kg 639lbs	2220 x 905 x 1473 mm 87.50 x 35.62 x 58.00"
CUSC-84G-4D	1 Doors & 4 Drawers	36	2136 x 877 x 905 or 1387 mm 84.00 x 34.50 x 35.62 or 54.62"	2	115/60/1	5.5	600 W 0.81 HP	255 kg 562 lbs	335 kg 739 lbs	2220 x 905 x 1473 mm 87.50 x 35.62 x 58.00"
CUSC-84G-6D	6 Drawers	36	2136 x 877 x 905 or 1387 mm 84.00 x 34.50 x 35.62 or 54.62"	0	115/60/1	5.5	600 W 0.81 HP	270 kg 596 lbs	350 kg 772 lbs	2220 x 905 x 1473 mm 87.50 x 35.62 x 58.00"
CUSC-96G	3 Doors	42	2440 x 877 x 905 or 1387 mm 96.00 x 34.50 x 35.62 or 54.62"	6	115/60/1	6	650 W 0.88 HP	260 kg 572 lbs	340 kg 748 lbs	2524 x 905 x 1473 mm 99.38 x 35.62 x 58.00"
CUSC-96G-2D	2 Doors & 2 Drawers	42	2440 x 877 x 905 or 1387 mm 96.00 x 34.50 x 35.62 or 54.62"	4	115/60/1	6	650 W 0.88 HP	270 kg 596 lbs	350 kg 772 lbs	2524 x 905 x 1473 mm 99.38 x 35.62 x 58.00"
CUSC-96G-4D	1 Doors & 4 Drawers	42	2440 x 877 x 905 or 1387 mm 96.00 x 34.50 x 35.62 or 54.62"	2	115/60/1	6	650 W 0.88 HP	285 kg 629 lbs	365 kg 805 lbs	2524 x 905 x 1473 mm 99.38 x 35.62 x 58.00"
CUSC-96G-6D	6 Drawers	42	2440 x 877 x 905 or 1387 mm 96.00 x 34.50 x 35.62 or 54.62"	0	115/60/1	6	650 W 0.88 HP	300 kg 662 lbs	380 kg 838 lbs	2524 x 905 x 1473 mm 99.38 x 35.62 x 58.00"

www.sub-equip.com

SALAD & SANDWICH PREP TABLE -MARBLE COUNTERTOP





Features

- Premium Construction: Built with heavy-duty marble countertop for a clean, upscale, and professional look.
- Glass Sneeze Guard Display with led light: Clear, durable glass construction provides excellent visibility and hygiene protection.
- Reinforced 8" Wide Edge: Provides added workspace, superior stability, and a polished finish designed for busy commercial kitchens.
- Refrigerated Pan Well: Multi-slot top accommodates a variety of food pans—ideal for salad bars, cold toppings, dessert stations, pizza prep, and deli service.
- Commercial-Grade Stainless Steel: Exterior made from 430 stainless steel; interior built with 304 stainless steel for long-lasting durability and hygiene.
- Efficient Refrigeration: CFC-free refrigerant, thick foam insulation, auto defrosting, and auto evaporation system to prevent condensation.
- Easy Operation & Mobility: Self-closing swing door, adjustable epoxy-coated shelves, and 4" casters with front brakes for effortless movement.
- Clean & Low Maintenance: Smooth marble surfaces are easy to wipe down—ideal for high-volume foodservice environments.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.
- R-290 Refrigerant
- Certified Safe: SGS & SGS Sanitation certified for professional commercial kitchen use.

www.sub-equip.com







- Interior temperature range: −2.2°C to 0.6°C (28°F to 33°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CSSU-48M-BM	2 Doors	1224.6 x 1013.6 x 1512.9 mm 48.2 x 39.9 x 59.6"	2	115/60/1	3.6	392 W 0.53 HP	5-15P	161 kg 354.9 lbs	260 kg 573.2 lbs	1305 x 1103 x 1665 mm 51.38 × 43.43 × 65.55"
CSSU-60M-BM	2 Doors	1524 x 1013.6 x 1512.9 mm 60 x 39.9 x 59.6"	2	115/60/1	4.6	490 W 0.66 HP	5-15P	201 kg 443.1 lbs	291 kg 641.5 lbs	1605 x 1103 x 1665 mm 63.19 × 43.43 × 65.55"
CSSU-72M-BM	3 Doors	1821.6 x 1013.6 x 1512.9 mm 71.7 x 39.9 x 59.6"	3	115/60/1	4.6	490 W 0.66 HP	5-15P	208 kg 458.6lbs	315 kg 694.5 lbs	1910 x 1103 x 1665 mm 75.20 × 43.43 × 65.55"







- Interior temperature range: −2.2°C to 0.6°C (28°F to 33°F)

Model	Doors	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CSSU-48M-SV	2 Doors	1224.6 x 906 x 1532.6 mm 48.2 x 35.6 x 60.4"	2	115/60/1	3.6	392 W 0.53 HP	5-15P	168 kg 370.4 lbs	266.5 kg 587.3 lbs	1305 x 955 x 1665 mm 51.38 × 37.60 × 65.55"
CSSU-60M-SV	2 Doors	1524 x 906 x 1532.6 mm 60 x 35.6 x 60.4"	2	115/60/1	4.6	490 W 0.66 HP	5-15P	209 kg 460.8 lbs	"310 kg 683.4 lbs	1605 x 995 x 1665 mm 63.19 × 39.17 × 65.55"
CSSU-72M-SV	3 Doors	1821.6 x 906 x 1532.6 mm 71.7 x 35.6 x 60.4"	3	115/60/1	4.6	490 W 0.66 HP	5-15P	217 kg 478.4 lbs	325 kg 716.5 lbs	1910 x 995 x 1665 mm 75.20 × 39.17 × 65.55"

www.sub-equip.com

Marbletop Undercounter Refrigerator with 8 pcs sauce pans



Durable Stainless Steel Construction
Built with commercial-grade stainless steel for long-lasting performance in restaurants, cafés, dessert shops, salad bars, and bubble tea stores.

Marble Countertop
Premium white marble top delivers an elegant, easy-to-clean work surface that resists stains, scratches, and moisture.

8 Round Cut-Out Wells
Designed to hold standard topping containers for ingredients such as fruit, sauces, jellies, condiments, and cold bar prep items.

Glass Sneeze Guard Display
Front and top glass canopy provides clear visibility while protecting displayed ingredients and ensuring food-safe operation.

Heavy-Duty Casters
Equipped with 4" lockable casters for easy movement, cleaning, and installation.

Easy Maintenance
Front-accessible components, removable pans, and stainless steel surfaces simplify daily cleaning routines.

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors	S/S Bain-Marie	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUC-60-ST	2 Doors	8	1554 × 771 × 1593.9 mm 61.18" × 30.35" × 62.75"	2	115/60/1	4	440 W 0.59 HP	5-15P	213.5KG 471 lbs	268.5KG 592 lbs	1636 × 855 × 1730 mm 64.41" × 33.66" × 68.11"

www.sub-equip.com

Undercounter Refrigerator with 8 pcs 1/6 size pans

- 「DOE COMPLIANT」 「NRCan COMPLIANT」





Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Swing Door
- Magnetic gasket can be replaced without any tools
- External: 430 Stainless Steel framework construction
- Internal: 304 Stainless Steel
- Auto defrosting and auto evaporation to prevent condensation
- The coated copper tube, with a robust 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, it has only two welding joints, reducing the risk of leaks
- Condensor sits inside the condensation pan efficiently evaporates excess water
- Adjustable, heavy-duty epoxy coated wire shelves
- 1/6 size Polycarbonate GN pan(8pcs) and 9" plastic cutting board included
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors & Drawers	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CSSU-60-2D8L	1 Door & 2 Drawers	8	1524 x 760 x 912 or 1079mm 60.00 x 29.92 x 35.9" or 42.5"	1	115/60/1	4	440 W 0.59 HP	5-15P	134 kg 295 lbs	185 kg 407 lbs	1636 x 855 x 1145 mm 64.41 x 33.66 x 45.08"

www.sub-equip.com

PIZZA PREP TABLE REFRIGERATOR

- 「DOE COMPLIANT」 「NRCan COMPLIANT」



Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Swing Door
- Magnetic gasket can be replaced without any tools
- External: 430 Stainless Steel framework construction
- Internal: 304 Stainless Steel
- Auto defrosting and auto evaporation to prevent condensation
- The coated copper tube, with a robust 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, it has only two welding joints, reducing the risk of leaks
- Condensor sits inside the condensation pan efficiently evaporates excess water
- Adjustable, heavy-duty epoxy coated wire shelves
- 1/3 size Polycarbonate GN pan and plastic cutting board included
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Cutting Board Depth: 453 mm (17.9")

Model	Doors & Drawers	1/3 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CPP-44	1 Door	6	1222 x 896 x 946 or 1097 mm 48.00 x 35.38 x 37.25 or 43.25"	2	115/60/1	4	400 W 0.54 HP	5-15P	118.5 kg 262 lbs	168.5 kg 372 lbs	1300 x 945 x 1180 mm 51.25 x 37.25 x 46.50"
CPP-44-2D	2 Drawers	6	1222 x 896 x 946 or 1097 mm 48.00 x 35.38 x 37.25 or 43.25"	0	115/60/1	4	400 W 0.54 HP	5-15P	128.5 kg 284 lbs	178.5 kg 394 lbs	1300 x 945 x 1180 mm 51.25 x 37.25 x 46.50"
CPP-67	2 Doors	9	1830 x 896 x 946 or 1097 mm 72.00 x 35.38 x 37.25 or 43.25"	4	115/60/1	4.5	450 W 0.61 HP	5-15P	129 kg 284 lbs	183 kg 403 lbs	1910 x 945 x 1180 mm 75.25 x 37.25 x 46.50"
CPP-67-2D	1 Door & 2 Drawers	9	1830 x 896 x 946 or 1097 mm 72.00 x 35.38 x 37.25 or 43.25"	2	115/60/1	4.5	450 W 0.61 HP	5-15P	139 kg 307 lbs	203 kg 448 lbs	1910 x 945 x 1180 mm 75.25 x 37.25 x 46.50"
CPP-67-4D	4 Drawers	9	1830 x 896 x 946 or 1097 mm 72.00 x 35.38 x 37.25 or 43.25"	0	115/60/1	4.5	450 W 0.61 HP	5-15P	159 kg 351 lbs	223 kg 492 lbs	1910 x 945 x 1180 mm 75.25 x 37.25 x 46.50"
CPP-93	3 Doors	12	2440 x 896 x 946 or 1097 mm 96.00 x 35.38 x 37.25 or 43.25"	6	115/60/1	6	600 W 0.81 HP	5-15P	190 kg 418 lbs	230 kg 506 lbs	2520 x 945 x 1180 mm 99.25 x 37.25 x 46.50"
CPP-93-2D	2 Doors & 2 Drawers	12	2440 x 896 x 946 or 1097 mm 96.00 x 35.38 x 37.25 or 43.25"	4	115/60/1	6	600 W 0.81 HP	5-15P	198 kg 436 lbs	238 kg 523 lbs	2520 x 945 x 1180 mm 99.25 x 37.25 x 46.33"
CPP-93-4D	1 Door & 4 Drawers	12	2440 x 896 x 946 or 1097 mm 96.00 x 35.38 x 37.25 or 43.25"	2	115/60/1	6	600 W 0.81 HP	5-15P	206 kg 453 lbs	246 kg 541 lbs	2520 x 945 x 1180 mm 99.25 x 37.25 x 46.25"
CPP-93-6D	6 Drawers	12	2440 x 896 x 946 or 1097 mm 96.00 x 35.38 x 37.25 or 43.25"	0	115/60/1	6	600 W 0.81 HP	5-15P	216 kg 475 lbs	254 kg 559 lbs	2520 x 945 x 1180 mm 99.25 x 37.25 x 46.25"

www.sub-equip.com

WORKSTATION REFRIGERATOR



Features

- All-in-One Underbar Station
- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Refrigerated base drawers & self-closing swing door
- The coated copper tube, boasting a epoxy 0.7mm thickness, ensures durability. Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- INTERIOR: 304 Stainless Steel ; EXTERIOR: 430 Stainless Steel
- Integrated bar sink with faucet & drainboard
- Heavy-duty polyethylene coated adjustable wire shelves
- 1/6 size stainless steel pans
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range: 1°C to 4°C (33°F to 40°F)

Model	Doors & Drawers	1/3 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
CUSS-60	1 Door & 1 Drawer	5	1526.6 x 802.6 x 1002 mm 60.10 x 31.60 x 39.40"	1	115/60/1	4	400 W 0.54 HP	5-15P	190 kg 418 lbs	240 kg 528 lbs	1636 x 945 x 1210 mm 64.40 x 37.20 x 47.60"
CUSS-72	1 Door &1 Drawer	6	1830.6 x 802.6 x 1002 mm 72.10 x 31.60 x 39.40"	1	115/60/1	4	400 W 0.54 HP	5-15P	200 kg 440 lbs	260 kg 572 lbs	1904 x 945 x 1210 mm 75.00 x 37.20 x 47.60"
CUSS-84	1 Door & 2 Drawers	7	2138.2 x 802.6 x 1002 mm 84.20 x 31.60 x 39.40"	1	115/60/1	5.5	550 W 0.75 HP	5-15P	220 kg 484 lbs	280 kg 616 lbs	2224 x 945 x 1210 mm 87.60 x 37.20 x 47.60"
CUSS-96	1 Door & 2 Drawers	9	2438.3 x 802.6 x 1002 mm 96.00 x 31.60 x 39.40"	1	115/60/1	6	600 W 0.81 HP	5-15P	250 kg 550 lbs	300 kg 660 lbs	2528 x 945 x 1210 mm 99.50 x 37.20 x 47.60"

www.sub-equip.com

GRAB N GO REFRIGERATOR



Features

- All-steel base construction with Stainless Steel exterior
- Easily accessible light and power switch
- Rear access to refrigeration system for quick and easy service Adjustable leg levelers
- On-Demand PTC condensate evaporator provided for a totally self-contained system
- Stainless Steel step riser
- Night curtain included
- Auto defrosting and auto evaporation to prevent condensation Condensation pan efficiently evaporates excess water
- EXTERIOR: 430 Stainless steel
- INTERIOR: 304 Stainless steel
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range: 2°C to 8°C (36°F to 46°F)

Model	Type	Exterior Dimensions (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
GNG-F30	Square ends	762 x 864 x 838 mm 30.00 x 34.00 x 33.00"	115/60/1	9.45	817 W 1.10 HP	5-15P	103 kg 227 lbs	130 kg 287 lbs	850 x 970 x 1037 mm 33.50 x 38.25 x 40.88"
GNG-F36	Square ends	914 x 864 x 838 mm 36.00 x 34.00 x 33.00"	115/60/1	9.33	818 W 1.10HP	5-15P	109 kg 240 lbs	147 kg 324 lbs	995 x 970 x 1037 mm 39.50 x 38.25 x 40.88"
GNG-F50	Square ends	1270 x 864 x 838 mm 50.00 x 34.00 x 33.00"	115/60/1	10	834 W 1.12 HP	5-15P	130 kg 287 lbs	169 kg 373 lbs	1345 x 970 x 1037 mm 53.00 x 38.25 x 40.88"
GNG-F59	Square ends	1499 x 864 x 838 mm 59.00 x 34.00 x 33.00"	115/60/1	9.1	780W 1.05 HP	5-15P	160 kg 353 lbs	209 kg 461 lbs	1580 x 970 x 1037 mm 62.25 x 38.25 x 40.88"
GNG-F77	Square ends	1956 x 864 x 838 mm 77.00 x 34.00 x 33.00"	115/60/1	17.7	1528 W 2.05 HP	Dual 5-15P	209 kg 461 lbs	257 kg 567 lbs	2035 x 970 x 1037 mm 80.12 x 38.25 x 40.88"

Model	Type	Exterior Dimensions (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
GNG-C30	Curved ends	762 x 864 x 838 mm 30.00 x 34.00 x 33.00"	115/60/1	9.45	817 W 1.10 HP	5-15P	103 kg 227 lbs	130 kg 287 lbs	850 x 970 x 1037 mm 33.50 x 38.25 x 40.88"
GNG-C36	Curved ends	914 x 864 x 838 mm 36.00 x 34.00 x 33.00"	115/60/1	9.33	818 W 1.10HP	5-15P	109 kg 240 lbs	147 kg 324 lbs	995 x 970 x 1037 mm 39.50 x 38.25 x 40.88"
GNG-C50	Curved ends	1270 x 864 x 838 mm 50.00 x 34.00 x 33.00"	115/60/1	10	834 W 1.12 HP	5-15P	130 kg 287 lbs	169 kg 373 lbs	1345 x 970 x 1037 mm 53.00 x 38.25 x 40.88"
GNG-C59	Curved ends	1499 x 864 x 838 mm 59.00 x 34.00 x 33.00"	115/60/1	9.1	780W 1.05 HP	5-15P	160 kg 353 lbs	209 kg 461 lbs	1580 x 970 x 1037 mm 62.25 x 38.25 x 40.88"
GNG-C77	Curved ends	1956 x 864 x 838 mm 77.00 x 34.00 x 33.00"	115/60/1	17.7	1528 W 2.05 HP	Dual 5-15P	209 kg 461 lbs	257 kg 567 lbs	2035 x 970 x 1037 mm 80.12 x 38.25 x 40.88"

www.sub-equip.com

GRAB N GO-REFRIGERATED AIR MERCHANDISER





Features

- Digital temperature controller
- LED lighting on every shelf
- Night curtain included
- Adjustable shelves for flexible storage
- Easy-to-install 4" casters (front locking) standard on all units
- Exterior: 430 stainless steel construction
- Interior: 304 stainless steel construction
- Integrated price label holders
- On-demand PTC condensate evaporator for a fully self-contained system
- Automatic defrost and evaporation system to prevent condensation
- Interior temperature range: 1°C to 5°C (33.8°F to 41°F)
- Double-tempered glass side panels
- Electrical: 115V / 60Hz / 1 Phase, NEMA 5-15P plug with 10 ft power cord
- 60", 72", 79" and 84" equipped with a 5-20P plug
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range:
  1°C to 5°C (33.8°F to 41°F), at an ambient temperature of 25°C (77°F).

Model	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
GNG-30	762 × 800 × 2023 mm 30.0 × 31.5 × 79.6"	4	115/60/1	8	800 W 1.1 HP	5-15P	160 kg 352 lbs	200 kg 440 lbs	822 × 840 × 2165.5 mm 32.36 × 33.07 × 85.26"
GNG-36	914 × 800 × 2023 mm 35.98 × 31.5 × 79.6"	4	115/60/1	10	1000 W 1.3 HP	5-15P	190 kg 418 lbs	240 kg 528 lbs	974.4×840×2165.5 mm 38.36×33.07×85.26"
GNG-48	1220 × 800 × 2023 mm 48.03 × 31.5 × 79.6"	4	115/60/1	10	1000 W 1.3 HP	5-15P	210 kg 462 lbs	260 kg 572 lbs	1279.2 × 840 × 2165.5 mm 50.36 × 33.07 × 85.2"
GNG-60	1524 × 800 × 2023 mm 60.0 × 31.5 × 79.6"	8	115/60/1	12	1400 W 1.9 HP	5-20P	230 kg 506 lbs	280 kg 616 lbs	1584 × 840 × 2165.5 mm 62.36 × 33.07 × 85.26"
GNG-72	1828 × 800 × 2023 mm 71.97 × 31.5 × 79.6"	8	115/60/1	14	1600 W 2.2 HP	5-20P	260 kg 572 lbs	330 kg 726 lbs	1888.8 × 840 × 2165.5 mm 74.36 × 33.07 × 85.26 "
GNG-79	1998 × 800 × 2023 mm 78.66 × 31.5 × 79.6"	8	115/60/1	14	1600 W 2.2 HP	5-20P	280 kg 616 lbs	350 kg 770 lbs	2058 × 840 × 2165.5 mm 81.02 × 33.07 × 85.26"
GNG-84	2134 × 800 × 2023 mm 84.02 × 31.5 × 79.6"	8	115/60/1	16	1600 W 2.2 HP	5-20P	310 kg 682 lbs	380 kg 836 lbs	2193.6 × 840 × 2165.5 mm 86.36 × 33.07 × 85.26"

www.sub-equip.com

CAKE DISPLAY SHOWCASE



Features

- Energy efficient Low-e triple Four sides right angle design, good insulation and display effect
- CFC Free Refrigerant And Foam
- Electronic Thermostat And Digital LED Temperature Display For Accurate Control And Easy Reading
- Adjustable heavy Duty Shelves and Concealed Refrigerated Drawers design
- LED Light For Better Display.
- Efficient electrothermal defogging
- With fan cooling system.
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- High quality marble base, stylish appearance, durable, easy to clean
- Easy to mount 3″ casters (lockable in front) are standard with all units.
- Interior temperature range: 2°C to 8°C (36°F to 46°F)
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- Dual Compressors & Dual Plug: FDC-79-4D,FDC-95-4D
- R-290 refrigerant
- SGS & SGS Sanitation Certificate

www.sub-equip.com



- Interior temperature range: 2°C to 8°C (36°F to 46°F)

Model	Doors & Drawers	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
FDC-48-2D	2 Doors & 2 Drawers	1200 x 800 x 1359 mm 47.25 x 31.50 x 53.50"	1	115/60/1	12.2	1468 W 1.97 HP	5-15P	300 kg 660 lbs	330 kg 728 lbs	1280 x 890 x 1550 mm 50.50 x 35.00 x 61.00"
FDC-60-3D	2 Doors & 3 Drawers	1500 x 800 x 1359 mm 59.00 x 31.50 x 53.50"	1	115/60/1	13	1468 W 1.97 HP	5-15P	360 kg 792 lbs	400 kg 882 lbs	1580 x 890 x 1550 mm 62.25 x 35.00 x 61.00"
FDC-71-3D	2 Doors & 3 Drawers	1800 x 800 x 1359 mm 70.88 x 31.50 x 53.50"	1	115/60/1	13.8	1502 W 2.01 HP	5-15P	420 kg 924 lbs	470 kg 1037 lbs	1880 x 890 x 1550 mm 74.00 x 35.00 x 61.00"
FDC-79-4D	4 Doors & 4 Drawers	2000 x 800 x 1359 mm 78.75 x 31.50 x 53.50"	1	115/60/1	22	1912 W 2.56 HP	Dual 5-15P	490 kg 1078 lbs	540 kg 1191 lbs	2080 x 890 x 1550 mm 82.00 x 35.00 x 61.00"
FDC-95-4D	4 Doors & 4 Drawers	2400 x 800 x 1359 mm 94.50 x 31.50 x 53.50"	1	115/60/1	24	2000 W 2.68 HP	Dual 5-15P	540 kg 1188 lbs	600 kg 1323 lbs	2480 x 890 x 1550 mm 97.75 x 35.00 x 61.00"

www.sub-equip.com

SUSHI DISPLAY SHOWCASE





Features

- Material: 304 fingerprint-resistant stainless steel
- Lighting: 4000K LED interior lighting
- Cooling System: Direct cooling with concealed piping;
- Temperature range -2°C to 2°C (28.4°F to 35.6°F)
- Door Type: Glass sliding door
- Flat top – suitable for food preparation or product display
- Drainage: Large 1" diameter drain for faster and easier cleaning
- Refrigerant: Environmentally friendly R290 hydrocarbon refrigerant
- Electrical: 115V / 60Hz / 1Ph, NEMA 5-15P plug, 10 ft power cord
- Certification: SGS & SGS Sanitation Certified

www.sub-equip.com









- Interior temperature range: -2°C to 2°C (28.4°F to 35.6°F)

Model	Condenser Display case	Exterior Dimensions (W x D x H)	Sliding Back Doors	103 x 262mm 4.06 x 10.32" Size Pan	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
SSC-91-L	Left Side	914 x 305 x 266 mm 36 x 12 x 10.50"	2	4	115/60/1	2.5	360 W 0.48 HP	5-15P	32 kg 71 lbs	45 99 lbs	1014 x 405 x 384 mm 39.92 x 15.94 x 15.12"
SSC-91-R	Right Side	914 x 305 x 266 mm 36 x 12 x 10.50"	2	4	115/60/1	2.5	360 W 0.48 HP	5-15P	32 kg 71 lbs	45 99 lbs	1014 x 405 x 384 mm 39.92 x 15.94 x 15.12"
SSC-122-L	Left Side	1219 x 305 x 266 mm 48 x 12 x 10.50"	2	7	115/60/1	2.5	360 W 0.48 HP	5-15P	36 kg 79 lbs	51 kg 113 lbs	1319 x 405 x 384 mm 51.93 x 15.94 x 15.12"
SSC-122-R	Right Side	1219 x 305 x 266 mm 48 x 12 x 10.50"	2	7	115/60/1	2.5	360 W 0.48 HP	5-15P	36 kg 79 lbs	51 kg 113 lbs	1319 x 405 x 384 mm 51.93 x 15.94 x 15.12"
SSC-152-L	Left Side	1524 x 305 x 266 mm 60 x 12 x 10.50"	4	10	115/60/1	2.5	360 W 0.48 HP	5-15P	44 kg 97 lbs	68 kg 150 lbs	1624 x 405 x 384 mm 63.94 x 15.94 x 15.12"
SSC-152-R	Right Side	1524 x 305 x 266 mm 60 x 12 x 10.50"	4	10	115/60/1	2.5	360 W 0.48 HP	5-15P	44 kg 97 lbs	68 kg 150 lbs	1624 x 405 x 384 mm 63.94 x 15.94 x 15.12"
SSC-182-L	Left Side	1830 x 305 x 266 mm 72 x 12 x 10.50"	4	13	115/60/1	2.5	360 W 0.48 HP	5-15P	48 kg 106 lbs	74 kg 163 lbs	1930 x 405 x 384 mm 75.98 x 15.94 x 15.12"
SSC-182-R	Right Side	1830 x 305 x 266 mm 72 x 12 x 10.50"	4	13	115/60/1	2.5	360 W 0.48 HP	5-15P	48 kg 106 lbs	74 kg 163 lbs	1930 x 405 x 384 mm 75.98 x 15.94 x 15.12"
SSC-213-L	Left Side	2134 x 305 x 266 mm 84 x 12 x 10.50"	4	15	115/60/1	2.5	360 W 0.48 HP	5-15P	55 kg 121 lbs	84 kg 185 lbs	2234 x 405 x 384 mm 87.95 x 15.94 x 15.12"
SSC-213-R	Right Side	2134 x 305 x 266 mm 84 x 12 x 10.50"	4	15	115/60/1	2.5	360 W 0.48 HP	5-15P	55 kg 121 lbs	84 kg 185 lbs	2234 x 405 x 384 mm 87.95 x 15.94 x 15.12"

www.sub-equip.com

REFRIGERATED DISPLAY SHOWCASE -Bottom Mounted Compressor



www.sub-equip.com



Features

- Material: 304 fingerprint-resistant stainless steel
- Lighting: 4000K LED interior lighting
- Cooling System: Direct cooling with concealed piping;
- Temperature range -2°C to 2°C (28.4°F to 35.6°F)
- Door Type: Glass sliding door
- Flat top – suitable for food preparation or product display
- Drainage: Large 1" diameter drain for faster and easier cleaning
- Refrigerant: Environmentally friendly R290 hydrocarbon refrigerant
- Electrical: 115V / 60Hz / 1Ph, NEMA 5-15P plug, 10 ft power cord
- Certification: SGS & SGS Sanitation Certified

Model	Sliding Back Doors	Exterior Dimensions (W x D x H)	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
SSC-91-D	2	914 x 305 x (299+350) mm 35.98 × 12.01 × (11.77″ + 13.78″)	115/60/1	3.5	360 W 0.48 HP	5-15P	40 kg 88 lbs	79 kg 174 lbs	1120 × 430 × 900 mm 44.09 × 16.93 × 35.43″
SSC-122-D	2	1219 x 305 x (299+350) mm 47.99 × 12.01 × (11.77″ + 13.78″)	115/60/1	3.5	360 W 0.48 HP	5-15P	45 kg 99 lbs	87 kg 192 lbs	1425 × 430 × 900 mm 56.10 × 16.93 × 35.43″
SSC-152-D	4	1524 x 305 x (299+350) mm 60.00 × 12.01 × (11.77″ + 13.78″)	115/60/1	3.5	360 W 0.48 HP	5-15P	50 kg 110 lbs	95 kg 209 lbs	1730 × 430 × 900 mm 68.11 × 16.93 × 35.43″
SSC-182-D	4	1830 x 305 x (299+350) mm 72.05 × 12.01 × (11.77″ + 13.78″)	115/60/1	3.5	360 W 0.48 HP	5-15P	56 kg 124 lbs	106 kg 234 lbs	2036 × 430 × 900 mm 80.16 × 16.93 × 35.43″
SSC-213-D	4	2134 x 305 x (299+350) mm 84.02 × 12.01 × (11.77″ + 13.78″)	115/60/1	2.5	360 W 0.48 HP	5-15P	62 kg 137 lbs	118 kg 260 lbs	2340 × 430 × 900 mm 92.13″ × 16.93″ × 35.43″