


www.sub-equip.com

2024 PRODUCTS





WELCOME

Sub-equip has its beginnings in 2018 when a group of passionate individuals in the restaurant and foodservice industry wanted to dedicate a space to help restaurateurs and foodservice businesses access restaurant quality smallwares and equipment.

With an expanding online presence, Sub-equip is a restaurant and kitchen supplier that delivers an expansive line of products from front of house operations all the way to janitorial products. Our product line and offerings is continuously being curated and manufactured to meet client demands and the high standards of the food industry. We are committed to offering reliable and high-quality products.



TABLE OF CONTENTS

BLACK SWING GLASS DOOR MERCHANDISER REFRIGERATOR	1
BLACK SWING GLASS DOOR MERCHANDISER FREEZER	2
BLACK SLIDING GLASS DOOR MERCHANDISER REFRIGERATOR	3
PASS THROUGH REFRIGERATOR	4
STAINLESS STEEL GLASS DOOR REACH-IN REFRIGERATOR	5
STAINLESS STEEL GLASS DOOR REACH-IN FREEZER	6
STAINLESS STEEL GLASS DOOR REACH-IN REFRIGERATOR WITH DRAWER	7,8
STAINLESS STEEL GLASS DOOR REACH-IN FREEZER WITH DRAWER	9,10
STAINLESS STEEL SOLID DOOR REACH-IN REFRIGERATOR	11
STAINLESS STEEL SOLID DOOR REACH-IN FREEZER	12
STAINLESS STEEL SOLID DOOR REACH-IN REFRIGERATOR WITH DRAWER	13,14
STAINLESS STEEL SOLID DOOR REACH-IN FREEZER WITH DRAWER	15,16
DRY AGING CABINET	17
UNDER COUNTER REFRIGERATOR	18
UNDER COUNTER FREEZER	19
UNDER COUNTER REFRIGERATOR WITH DRAWER	20
UNDER COUNTER FREEZER WITH DRAWER	21
UNDER COUNTER REFRIGERATOR WITH SIDE MOUNTED COMPRESSOR	22
UNDER COUNTER FREEZER WITH SIDE MOUNTED COMPRESSOR	23
UNDER COUNTER REFRIGERATOR WITH SIDE MOUNTED COMPRESSOR & DRAWER	24
UNDER COUNTER FREEZER WITH SIDE MOUNTED COMPRESSOR & DRAWER	25
CHEF BASE REFRIGERATOR	26
CHEF BASE FREEZER	27
PIZZA PRE TABLE REFRIGERATOR	28,29
SALAD & SANDWICH PRE TABLE (REGULAR TOP REFRIGERATOR)	30
SALAD & SANDWICH PRE TABLE (REGULAR TOP REFRIGERATOR WITH DRAWER)	31
SALAD & SANDWICH PRE TABLE (MEGA TOP REFRIGERATOR)	32
SALAD & SANDWICH PRE TABLE (MEGA TOP REFRIGERATOR WITH DRAWERS)	33
SALAD & SANDWICH PRE TABLE (REGULAR TOP REFRIGERATOR WITH SIDE MOUNTED COMPRESSOR)	34
SALAD & SANDWICH PRE TABLE (MEGA TOP REFRIGERATOR WITH SIDE MOUNTED COMPRESSOR)	35
WORKSTATION REFRIGERATOR	36
BLAST CHILLER / FREEZER	37,38
CAKE DISPLAY SHOWCASE	39
PRE TABLE WITH SNEEZE GLASS REFRIGERATOR	40
PRE TABLE WITH SNEEZE GLASS REFRIGERATOR WITH DRAWER	41
GRAB AND GO REFRIGERATOR (SELF-SERVE COUNTER CASE-SQUARE ENDS)	42
GRAB AND GO REFRIGERATOR (SELF-SERVE COUNTER CASE-CURVED ENDS)	43


Black Swing Glass Door Merchandiser Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Black powder-coated steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

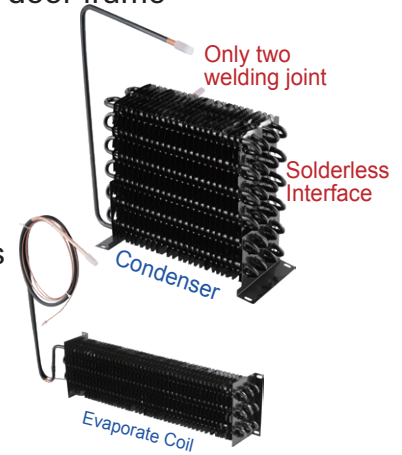

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CDM-B13R
CDM-B16R/CDM-B23R



CDM-B36R
CDM-B42R/CDM-B48R



CDM-B72R

Specifications

Model	Door	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CDM-B13R	1	22 3/4 x 23 7/8 x 80 7/8	12.7	5	115/60/1	4	500W/0.67HP	5-15P	177	25 x 26 1/4 x 88 3/4
CDM-B16R	1	25 x 26 x 80 7/8	15.5	5	115/60/1	7	700W/0.94HP	5-15P	265	27 3/8 x 28 3/8 x 88 3/4
CDM-B23R	1	26 3/4 x 32 x 80 7/8	21.5	5	115/60/1	7.5	800W/1.08HP	5-15P	331	29 1/4 x 35 x 88 3/4
CDM-B36R	2	39 1/2 x 32 x 80 7/8	32.6	10	115/60/1	7.5	800W/1.08HP	5-15P	397	47 7/8 x 35 x 88 3/4
CDM-B42R	2	48 x 32 x 80 7/8	40.1	10	115/60/1	7.5	800W/1.08HP	5-15P	441	50 1/2 x 35 x 88 3/4
CDM-B48R	2	54 x 32 x 80 7/8	45.2	10	115/60/1	14	1400W/1.89HP	5-15P	485	56 3/8 x 35 x 88 3/4
CDM-B72R	3	80 7/8 x 32 x 80 7/8	68.5	15	115/60/1	15	1600W/2.15HP	5-15P	750	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Black Swing Glass Door Merchandiser Freezer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Black powder-coated steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

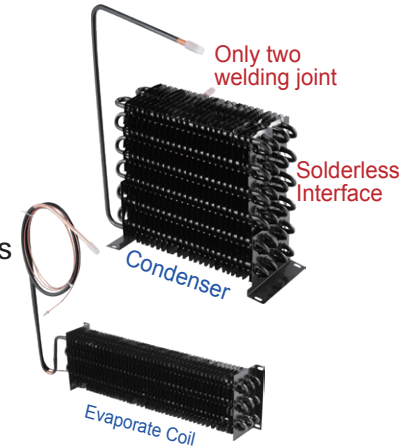

Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)



CDM-B13F



CDM-B16F/CDM-B23F



CDM-B36F
CDM-B42F/CDM-B48F



CDM-B72F

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CDM-B13F	1	22 3/4 x 23 7/8 x 80 7/8	12.7	5	115/60/1	4	500W/0.67HP	5-15P	177	25 x 26 1/4 x 88 3/4
CDM-B16F	1	25 x 26 x 80 7/8	15.5	5	115/60/1	7	700W/0.94HP	5-15P	265	27 3/8 x 28 3/8 x 88 3/4
CDM-B23F	1	26 3/4 x 32 x 80 7/8	21.5	5	115/60/1	7.5	800W/1.08HP	5-15P	331	29 1/4 x 35 x 88 3/4
CDM-B36F	2	39 1/2 x 32 x 80 7/8	32.6	10	115/60/1	7.5	800W/1.08HP	5-15P	397	47 7/8 x 35 x 88 3/4
CDM-B42F	2	48 x 32 x 80 7/8	40.1	10	115/60/1	10	1100W/1.48HP	5-15P	441	50 1/2 x 34 1/4 x 88 3/4
CDM-B48F	2	54 x 32 x 80 7/8	45.2	10	115/60/1	14	1400W/1.89HP	5-15P	405	56 3/8 x 35 x 88 3/4
CDM-B72F	3	80 7/8 x 32 x 80 7/8	68.5	15	115/60/1	15	1600W/2.15HP	5-15P	750	83 x 35 x 88 3/4



Natural
Refrigerant

If the data and structure update, without notice, subject to material object.


Black Sliding Glass Door Merchandiser Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Black powder-coated steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

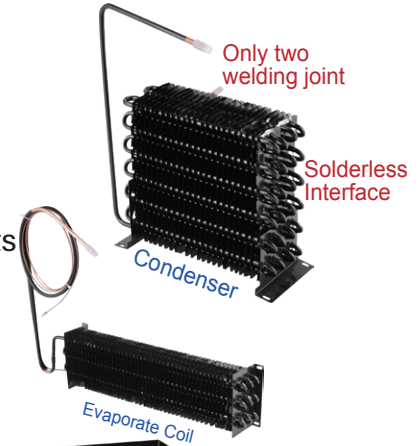

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CDM-B36SR
CDM-B42SR/CDM-B48SR



CDM-B72SR

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CDM-B36SR	2	39 1/2 x 30 x 80 7/8	32.6	10	115/60/1	7.5	800W/1.08HP	5-15P	397	47 7/8 x 32 3/8 x 88 3/4
CDM-B42SR	2	48 x 30 x 80 7/8	40.1	10	115/60/1	7.5	800W/1.08HP	5-15P	441	50 1/2 x 32 3/8 x 88 3/4
CDM-B48SR	2	54 x 30 x 80 7/8	45.2	10	115/60/1	7.5	800W/1.08HP	5-15P	405	56 3/8 x 35 x 88 3/4
CDM-B72SR	3	80 7/8 x 30 x 80 7/8	68.5	15	115/60/1	7.5	800W/1.08HP	5-15P	750	83 x 32 3/8 x 88 3/4



Natural
Refrigerant

If the data and structure update, without notice, subject to material object.


Pass Through Refrigerator



www.sub-equip.com


Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Double sliding glass doors at front & back for access on both sides-
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

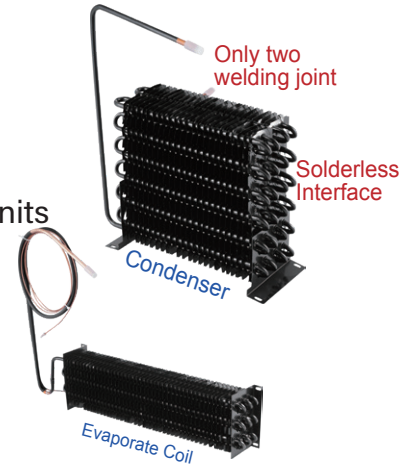

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)

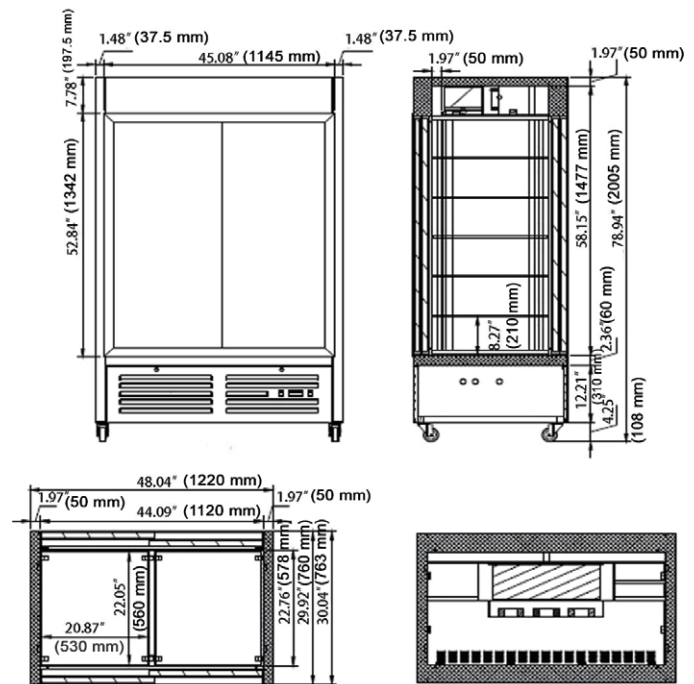

Specifications

Model	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Storage Capacity(cu./ft)	Ship Weight(lbs)	Ship Data W x D x H (in)
CDM-48T	48 x 30 x 79	44 x 22 3/4 x 52 7/8	5	115/60/1	5.5	600W/0.81HP	5-15P	46	405	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

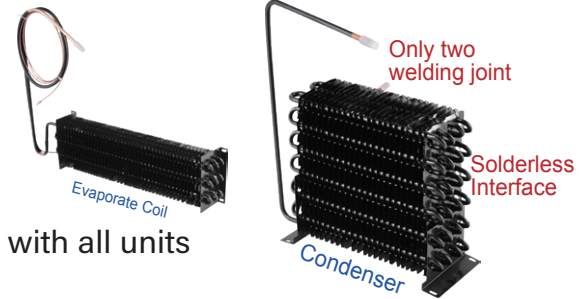

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



C-13RG/C-19RG/C-27RG

C-35RG/C-48RG/C-54RG

C-81RG

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Storage Capacity(cu.ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-13RG	1	22 3/4 x 23 7/8 x 80 7/8	12.7	5	115/60/1	4	500W/0.67HP	5-15P	199	25 x 26 1/4 x 88 3/4
C-19RG	1	26 3/4 x 25 5/8 x 80 7/8	16.5	5	115/60/1	7	700W/0.94HP	5-15P	287	29 1/4 x 28 x 88 3/4
C-27RG	1	26 3/4 x 32 x 80 7/8	21.5	5	115/60/1	7.5	800W/1.08HP	5-15P	342	29 1/4 x 35 x 88 3/4
C-35RG	2	39 1/2 x 32 x 80 7/8	32.6	10	115/60/1	7.5	800W/1.08HP	5-15P	419	47 7/8 x 35 x 88 3/4
C-48RG	2	48 x 32 x 80 7/8	40.1	10	115/60/1	14	1400W/1.88HP	5-15P	461	50 1/2 x 35 x 88 3/4
C-54RG	2	54 x 32 x 80 7/8	45.2	10	115/60/1	14	1400W/1.88HP	5-15P	529	56 3/8 x 35 x 88 3/4
C-81RG	3	80 3/4 x 32 x 80 7/8	68.5	15	115/60/1	15	1600W/2.15HP	5-15P	771	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Freezer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

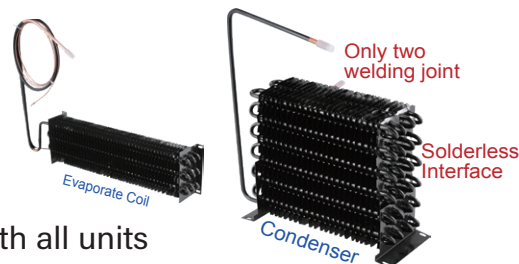

Temperature

-Interior temperature range: -18°C to -22°C (0°F to -8°F)



C-13FG/C-19FG/C-27FG



C-35FG/C-48FG/C-54FG



C-81FG

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Capacity(cu.ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-13FG	1	22 3/4 x 23 7/8 x 80 7/8	12.7	5	115/60/1	4	500W/0.67HP	5-15P	199	25 x 26 1/4 x 88 3/4
C-19FG	1	26 3/4 x 25 5/8 x 80 7/8	16.5	5	115/60/1	7	700W/0.94HP	5-15P	287	29 1/4 x 28 x 88 3/4
C-27FG	1	26 3/4 x 32 x 80 7/8	21.5	5	115/60/1	7.5	800W/1.08HP	5-15P	342	29 1/4 x 35 x 88 3/4
C-35FG	2	39 1/2 x 32 x 80 7/8	32.6	10	115/60/1	7.5	800W/1.08HP	5-15P	419	47 7/8 x 35 x 88 3/4
C-48FG	2	48 x 32 x 80 7/8	40.1	10	115/60/1	14	1400W/1.88HP	5-15P	461	50 1/2 x 35 x 88 3/4
C-54FG	2	54 x 32 x 80 7/8	45.2	10	115/60/1	14	1400W/1.88HP	5-15P	529	56 3/8 x 35 x 88 3/4
C-81FG	3	80 3/4 x 32 x 80 7/8	68.5	15	115/60/1	15	1600W/2.15HP	5-15P	771	83 x 35 x 88 3/4



Natural Refrigerant

If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

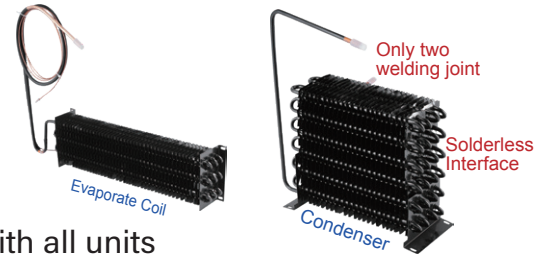

Temperature

-Interior temperature range: 1°C to 4°C (33°F to 40°F)



C-19RG-1D
C-27RG-1D



C-19RG-2D
C-27RG-2D



C-35RG-2D
C-48RG-2D/C-54RG-2D



C-35RG-4D
C-48RG-4D/C-54RG-4D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-19RG-1D	1 & 1	26 3/4 x 25 5/8 x 80 7/8	16.4	4	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 28 x 88 3/4
C-19RG-2D	1 & 2	26 3/4 x 25 5/8 x 80 7/8	16.4	3	115/60/1	7	700W/0.94HP	5-15P	331	29 1/4 x 28 x 88 3/4
C-27RG-1D	1 & 1	26 3/4 x 32 x 80 7/8	21.5	4	115/60/1	7.5	800W/1.08HP	5-15P	364	29 1/4 x 35 x 88 3/4
C-27RG-2D	1 & 2	26 3/4 x 32 x 80 7/8	21.5	3	115/60/1	7.5	800W/1.08HP	5-15P	364	29 1/4 x 35 x 88 3/4
C-35RG-2D	2 & 2	39 1/2 x 32 x 80 7/8	32.7	8	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35RG-4D	2 & 4	39 1/2 x 32 x 80 7/8	32.7	6	115/60/1	7.5	800W/1.08HP	5-15P	529	41 7/8 x 35 x 88 3/4
C-48RG-2D	2 & 2	48 x 32 x 80 7/8	40.1	8	115/60/1	14	1400W/1.08HP	5-15P	560	50 1/2 x 35 x 88 3/4
C-48RG-4D	2 & 4	48 x 32 x 80 7/8	40.1	6	115/60/1	14	1400W/1.08HP	5-15P	560	50 1/2 x 35 x 88 3/4
C-54RG-2D	2 & 2	54 x 32 x 80 7/8	45.2	8	115/60/1	14	1400W/1.08HP	5-15P	570	56 3/8 x 35 x 88 3/4
C-54RG-4D	2 & 4	54 x 32 x 80 7/8	45.2	6	115/60/1	14	1400W/1.08HP	5-15P	570	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Corrosion-Resistant Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

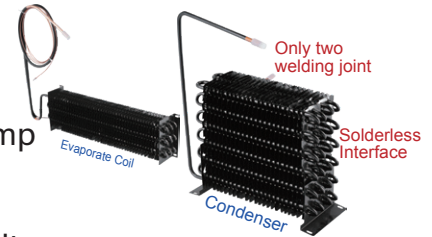

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



C-81RG-2D

C-81RG-3D

C-81RG-4D

C-81RG-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-81RG-2D	3 & 2	80 3/4 x 32 x 80 7/8	13	68.5	115/60/1	15	1600W/2.15HP	5-15P	740	83 x 35 x 88 3/4
C-81RG-3D	3 & 3	80 3/4 x 32 x 80 7/8	12	68.5	115/60/1	15	1600W/2.15HP	5-15P	760	83 x 35 x 88 3/4
C-81RG-4D	3 & 4	80 3/4 x 32 x 80 7/8	11	68.5	115/60/1	15	1600W/2.15HP	5-15P	780	83 x 35 x 88 3/4
C-81RG-6D	3 & 6	80 3/4 x 32 x 80 7/8	9	68.5	115/60/1	15	1600W/2.15HP	5-15P	820	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Freezer With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

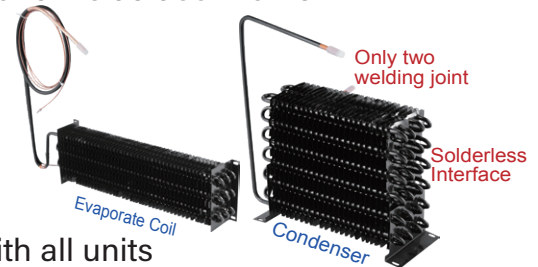

Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)



C-19FG-1D
C-27FG-1D



C-19FG-2D
C-27FG-2D



C-35FG-2D
C-48FG-2D/C-54FG-2D



C-35FG-4D
C-48FG-4D/C-54FG-4D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-19FG-1D	1 & 1	26 3/4 x 25 5/8 x 80 7/8	16.4	4	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 28 x 88 3/4
C-19FG-2D	1 & 2	26 3/4 x 25 5/8 x 80 7/8	16.4	3	115/60/1	7	700W/0.94HP	5-15P	331	29 1/4 x 28 x 88 3/4
C-27FG-1D	1 & 1	26 3/4 x 32 x 80 7/8	21.5	4	115/60/1	7.5	800W/1.08HP	5-15P	364	29 1/4 x 35 x 88 3/4
C-27FG-2D	1 & 2	26 3/4 x 32 x 80 7/8	21.5	3	115/60/1	7.5	800W/1.08HP	5-15P	364	29 1/4 x 35 x 88 3/4
C-35FG-2D	2&2	39 1/2 x 32 x 80 7/8	32.7	8	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35FG-4D	2&4	39 1/2 x 32 x 80 7/8	32.7	6	115/60/1	7.5	800W/1.08HP	5-15P	529	41 7/8 x 35 x 88 3/4
C-48FG-2D	2&2	48 x 32 x 80 7/8	40.1	8	115/60/1	14	1400W/1.08HP	5-15P	560	50 1/2 x 35 x 88 3/4
C-48FG-4D	2&2	48 x 32 x 80 7/8	40.1	8	115/60/1	14	1400W/1.08HP	5-15P	560	50 1/2 x 35 x 88 3/4
C-54FG-2D	2&2	54 x 32 x 80 7/8	45.2	8	115/60/1	14	1400W/1.88HP	5-15P	570	56 3/8 x 35 x 88 3/4
C-54FG-4D	2&4	54 x 32 x 80 7/8	45.2	8	115/60/1	14	1400W/1.88HP	5-15P	570	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Glass Door Reach-In Freezer With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Energy efficient Low-e triple pane glass doors with heater on glass and inside door frame
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: White powder-coated steel
- EXTERIOR: Corrosion-Resistant Stainless Steel, plastic top sign panel with lamp
- LED interior lighting to enhance product display
- Heavy-duty polyethylene coated adjustable wire shelves
- Easy to mount 4" casters (front casters with brakes) are standard with all units

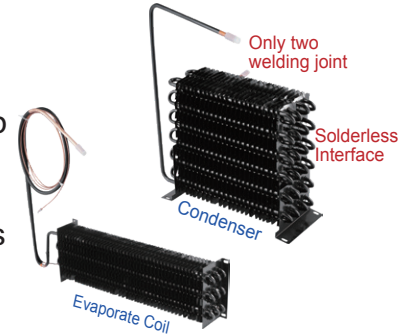

Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)



C-81FG-2D

C-81FG-3D

C-81FG-4D

C-81FG-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-81FG-2D	3 & 2	80 3/4 x 32 x 80 7/8	13	68.5	115/60/1	15	1600W/2.15HP	5-15P	740	83 x 35 x 88 3/4
C-81RG-3D	3 & 3	80 3/4 x 32 x 80 7/8	12	68.5	115/60/1	15	1600W/2.15HP	5-15P	760	83 x 35 x 88 3/4
C-81RG-4D	3 & 4	80 3/4 x 32 x 80 7/8	11	68.5	115/60/1	15	1600W/2.15HP	5-15P	780	83 x 35 x 88 3/4
C-81RG-6D	3 & 6	80 3/4 x 32 x 80 7/8	9	68.5	115/60/1	15	1600W/2.15HP	5-15P	820	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Solid Door Reach-In Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

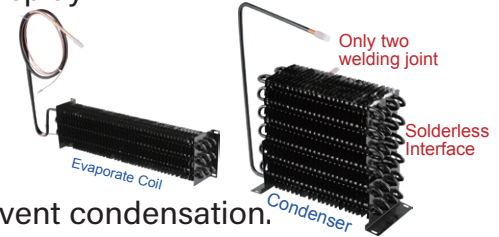

Temperature

- Interior temperature range: 1°C to 6°C (33°F to 46°F)
- Ambient temperature upto 45°C (113°F)



C-19BR/C-27BR



C-35BR/C-48BR/C-54BR



C-81BR

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-19BR	1	26 3/4 x 25 5/8 x 80 7/8	16.4	5	115/60/1	5.5	600W/0.81HP	5-15P	177	29 1/4 x 28 x 88 3/4
C-27BR	1	26 3/4 x 32 3/4 x 80 7/8	21.5	5	115/60/1	7	700W/0.94HP	5-15P	331	29 1/4 x 35 x 88 3/4
C-35BR	2	39 1/2 x 32 3/4 x 80 7/8	32.7	10	115/60/1	7.5	800W/1.08HP	5-15P	441	41 7/8 x 35 x 88 3/4
C-48BR	2	48 x 32 3/4 x 80 7/8	40.1	10	115/60/1	7.5	800W/1.08HP	5-15P	460	50 1/2 x 35 x 88 3/4
C-54BR	2	54 x 32 3/4 x 80 7/8	45.2	10	115/60/1	7.5	800W/1.08HP	5-15P	485	56 3/8 x 35 x 88 3/4
C-81BR	3	80 3/4 x 32 3/4 x 80 7/8	68.5	15	115/60/1	7.5	800W/1.08HP	5-15P	706	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Solid Door Reach-In Freezer

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



www.sub-equip.com

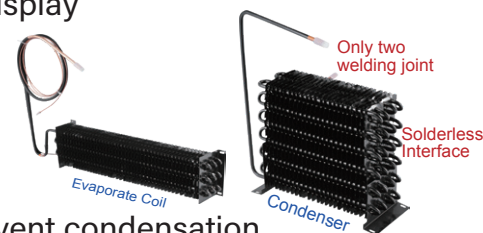

Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)
- Ambient temperature upto 45°C (113°F)



C-19BF/C-27BF



C-35BF/C-48BF/C-54BF



C-81BF

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Storage Capacity(cu./ft)	Shelves	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-19BF	1	26 3/4 x 25 5/8 x 80 7/8	16.4	5	115/60/1	5.5	600W/0.81HP	5-15P	177	29 1/4 x 28 x 88 3/4
C-27BF	1	26 3/4 x 32 3/4 x 80 7/8	21.5	5	115/60/1	7	700W/0.94HP	5-15P	331	29 1/4 x 35 x 88 3/4
C-35BF	2	39 1/2 x 32 3/4 x 80 7/8	32.7	10	115/60/1	7.5	800W/1.08HP	5-15P	441	41 7/8 x 35 x 88 3/4
C-48BF	2	48 x 32 3/4 x 80 7/8	40.1	10	115/60/1	7.5	800W/1.08HP	5-15P	460	50 1/2 x 35 x 88 3/4
C-54BF	2	54 x 32 3/4 x 80 7/8	45.2	10	115/60/1	7.5	800W/1.08HP	5-15P	485	56 3/8 x 35 x 88 3/4
C-81BF	3	80 3/4 x 32 3/4 x 80 7/8	68.5	15	115/60/1	15	1600W/2.15HP	5-15P	706	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Solid Door Reach-In Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

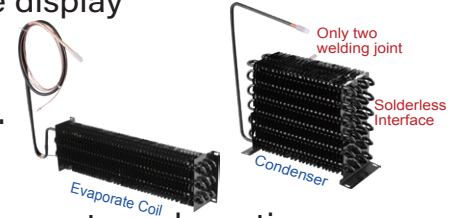

Temperature

- Interior temperature range: 1°C to 6°C (33°F to 46°F)
- Ambient temperature upto 45°C (113°F)



C-27BR-1D



C-27BR-2D



C-35BR-2D

C-48BR-2D/C-54BR-2D



C-35BR-2UD

C-48BR-2UD/C-54BR-2UD



C-35BR-4D

C-48BR-4D/C-54BR-4D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-27BR-1D	1 & 1	26 3/4 x 32 3/4 x 80 7/8	4	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-27BR-2D	1 & 2	26 3/4 x 32 3/4 x 80 7/8	3	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-35BR-2D	2&2	39 1/2 x 32 3/4 x 80 7/8	8	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BR-2UD	2&2	39 1/2 x 32 3/4 x 80 7/8	8	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BR-4D	2&4	39 1/2 x 32 3/4 x 80 7/8	6	32.7	115/60/1	7.5	800W/1.08HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-48BR-2D	2&2	48 x 32 3/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BR-2UD	2&2	48 x 32 3/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BR-4D	2&4	48 x 32 3/4 x 80 7/8	6	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-54BR-2D	2&2	54 x 32 3/4 x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BR-2UD	2&2	54 x 32 3/4x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BR-4D	2&4	54 x 32 3/4x 80 7/8	6	45.2	115/60/1	7.5	800W/1.08HP	5-15P	574	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.


Stainless Steel Solid Door Reach-In Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

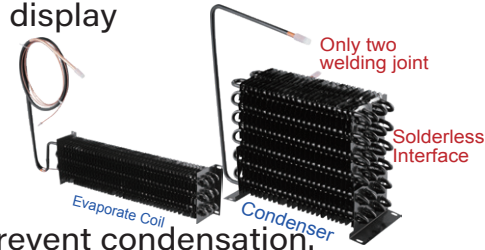

Temperature

- Interior temperature range: 1°C to 6°C (33°F to 46°F)
- Ambient temperature upto 45°C (113°F)



C-81BR-2

C-81BR-3

C-81BR-4

C-81BR-6

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-81BR-2	3 & 2	80 3/4 x 32 3/4 x 80 7/8	13	68.5	115/60/1	15	1600W/2.15HP	5-15P	740	83 x 35 x 88 3/4
C-81BR-3	3 & 3	80 3/4 x 32 3/4 x 80 7/8	12	68.5	115/60/1	15	1600W/2.15HP	5-15P	760	83 x 35 x 88 3/4
C-81BR-4	3 & 4	80 3/4 x 32 3/4 x 80 7/8	11	68.5	115/60/1	15	1600W/2.15HP	5-15P	780	83 x 35 x 88 3/4
C-81BR-6	3 & 6	80 3/4 x 32 3/4 x 80 7/8	9	68.5	115/60/1	15	1600W/2.15HP	5-15P	820	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.

Stainless Steel Solid Door Reach-In Freezer With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)
- Ambient temperature upto 45°C (113°F)



C-27BF-1D



C-27BF-2D



C-35BF-2D

C-48BF-2D/C-54BF-2D



C-35BF-2UD

C-48BF-2UD/C-54BF-2UD



C-35BF-4D

C-48BF-4D/C-54BF-4D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-27BF-1D	1 & 1	26 3/4 x 32 3/4 x 80 7/8	4	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-27BF-2D	1 & 2	26 3/4 x 32 3/4 x 80 7/8	3	21.5	115/60/1	7	700W/0.94HP	5-15P	309	29 1/4 x 35 x 88 3/4
C-35BF-2D	2&2	39 1/2 x 32 3/4 x 80 7/8	8	32.7	115/60/1	7	700W/0.94HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BF-2UD	2&2	39 1/2 x 32 3/4 x 80 7/8	8	32.7	115/60/1	7	700W/0.94HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-35BF-4D	2&4	39 1/2 x 32 3/4 x 80 7/8	6	32.7	115/60/1	7	700W/0.94HP	5-15P	485	41 7/8 x 35 x 88 3/4
C-48BF-2D	2&2	48 x 32 3/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BF-2UD	2&2	48 x 32 3/4 x 80 7/8	8	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-48BF-4D	2&4	48 x 32 3/4 x 80 7/8	6	40.1	115/60/1	7.5	800W/1.08HP	5-15P	500	50 1/2 x 35 x 88 3/4
C-54BF-2D	2&2	54 x 32 3/4 x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BF-2UD	2&2	54 x 32 3/4 x 80 7/8	8	45.2	115/60/1	7.5	800W/1.08HP	5-15P	530	56 3/8 x 35 x 88 3/4
C-54BF-4D	2&4	54 x 32 3/4 x 80 7/8	6	45.2	115/60/1	7.5	800W/1.08HP	5-15P	574	56 3/8 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.

Stainless Steel Solid Door Reach-In Freezer With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction 430 stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



Temperature

- Interior temperature range: -18°C to -22°C (0°F to -8°F)
- Ambient temperature upto 45°C (113°F)



C-81BF-2D



C-81BF-3D



C-81BF-4D



C-81BF-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Shelves	Capacity(cu./ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
C-81BF-2D	3 & 2	80 3/4 x 32 3/4 x 80 7/8	13	68.5	115/60/1	15	1600W/2.15HP	5-15P	740	83 x 35 x 88 3/4
C-81BF-3D	3 & 3	80 3/4 x 32 3/4 x 80 7/8	12	68.5	115/60/1	15	1600W/2.15HP	5-15P	760	83 x 35 x 88 3/4
C-81BF-4D	3 & 4	80 3/4 x 32 3/4 x 80 7/8	11	68.5	115/60/1	15	1600W/2.15HP	5-15P	780	83 x 35 x 88 3/4
C-81BF-6D	3 & 6	80 3/4 x 32 3/4 x 80 7/8	9	68.5	115/60/1	15	1600W/2.15HP	5-15P	820	83 x 35 x 88 3/4



If the data and structure update, without notice, subject to material object.

Dry Aging Cabinet



www.sub-equip.com

Features

- This high volume dry aging cabinet can hold up to 200lbs of product.
- Equipped with a compressor fan cooling system & air purification.
- Energy efficient low-e triple pane glass doors
- UV sterilization lamp reduce bacterial
- Auto defrosting and auto evaporation to prevent condensation .
- Inset LED light to improve products visibility and display Interior construed from 304 stainless steel
- Exterior construed with stainless steel & painted steel
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Humidity range:50~80% Humidification method: fan +water box
- 5pcs 304 stainless steel shelves included
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord

Temperature

- Interior temperature range: 2°C to 14°C (36°F to 57°F)




SL-406N



SL-902N


A beef, being dry aged for weeks even months, reach it's best taste

Changes of apperance

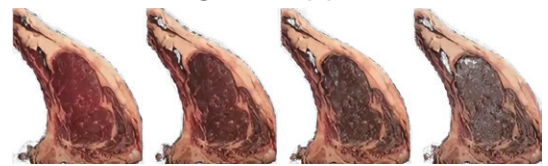

7 days 14 days 21 days 30 days

Changes of tenderness

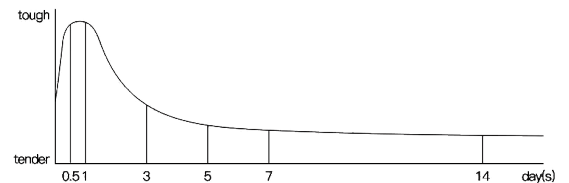

Specifications

Model	Shelf	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
SL-406N	5	26 1/2 x 23 5/8 x 72	115/60/1	3	250W/0.34HP	13.7	5-15P	298	29 1/2 x 26 x 80
SL-902N	10	47 1/8 x 23 5/8 x 72	115/60/1	5.5	500W/0.67HP	27.4	5-15P	596	49 1/2 x 26 x 80



If the data and structure update, without notice, subject to material object.


Under Counter Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

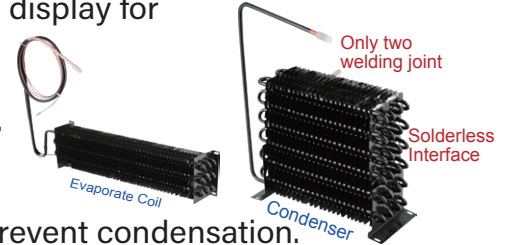

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Ambient temperature upto 45°C (113°F)



CUC27



CUC36



CUC48 / CUC60



CUC72



Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUC27	1	27 3/4 x 29 7/8 x 35 5/8	24 x 24 x 24 3/8	2	115/60/1	3	250W/0.34HP	6.5	5-15P	210	32 1/8 x 33 3/8 x 39
CUC36	2	36 1/4 x 29 7/8 x 35 5/8	32 1/2 x 24 x 24 3/8	2	115/60/1	3	300W/0.41HP	9	5-15P	225	39 1/2 x 33 3/8 x 39
CUC48	2	48 1/4 x 29 7/8 x 35 5/8	42 7/8 x 24 x 24 3/8	2	115/60/1	4	380W/0.51HP	12	5-15P	284	51 1/2 x 33 3/8 x 39
CUC60	2	61 1/8 x 29 7/8 x 35 5/8	55 7/8 x 24 x 24 3/8	2	115/60/1	4	380W/0.51HP	15	5-15P	335	64 1/2 x 33 3/8 x39
CUC72	3	71 3/4 x 29 7/8 x 35 5/8	66 3/8 x 24 x 24 3/8	2	115/60/1	4.5	400W/0.54HP	18	5-15P	397	75 x 33 3/8 x 39



If the data and structure update, without notice, subject to material object.


Under Counter Freezer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

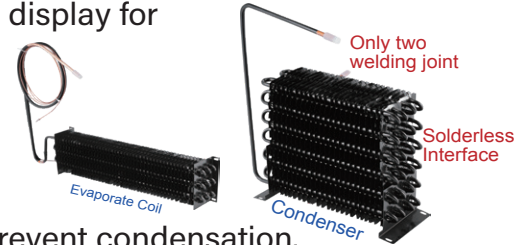

Temperature

- Interior temperature range: -17°C to -23°C (0°F to -10°F)
- Ambient temperature upto 45°C (113°F)



CUC27F



CUC36F



CUC48F / CUC60F



CUC72F



Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUC27F	1	27 3/4 x 29 7/8 x 35 5/8	24 x 24 x 24 3/8	2	115/60/1	3	250W/0.34HP	6.5	5-15P	214	32 1/8 x 33 3/8 x 39
CUC36F	2	36 1/4 x 29 7/8 x 35 5/8	32 1/2 x 24 x 24 3/8	2	115/60/1	3	300W/0.41HP	9	5-15P	230	39 1/2 x 33 3/8 x 39
CUC48F	2	48 1/4 x 29 7/8 x 35 5/8	42 7/8 x 24 x 24 3/8	2	115/60/1	4	380W/0.51HP	12	5-15P	289	51 1/2 x 33 3/8 x 39
CUC60F	2	61 1/8 x 29 7/8 x 35 5/8	55 7/8 x 24 x 24 3/8	2	115/60/1	5	450W/0.61HP	15	5-15P	336	64 1/2 x 33 3/8 x 39
CUC72F	3	71 3/4 x 29 7/8 x 35 5/8	66 3/8 x 24 x 24 3/8	2	115/60/1	5.5	500W/0.67HP	18	5-15P	399	75 x 33 3/8 x 39



If the data and structure update, without notice, subject to material object.


Under Counter Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

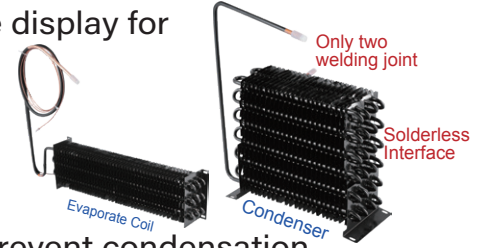

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Ambient temperature upto 45°C (113°F)



CUC27-2D



CUC36-2D
CUC48-2D/CUC60-2D



CUC72-2D



CUC72-4D



CUC36-4D
CUC48-4D/CUC60-4D



CUC72-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUC27-2D	0&2	27 3/4 x 29 7/8 x 35 5/8	6.5	115/60/1	3	250W/0.34HP	5-15P	219	33 3/8 x 32 1/8 x 39
CUC36-2D	1 &2	36 1/4 x 29 7/8 x 35 5/8	9	115/60/1	3	300W/0.41HP	5-15P	243	39 1/2 x 33 3/8 x 39
CUC36-4D	0&4	36 1/4 x 29 7/8 x 35 5/8	9	115/60/1	3	300W/0.41HP	5-15P	261	39 1/2 x 33 3/8 x 39
CUC48-2D	1 &2	48 1/4 x 29 7/8 x 35 5/8	12	115/60/1	4	380W/0.51HP	5-15P	285	51 1/2 x 33 3/8 x 39
CUC48-4D	0&4	48 1/4 x 29 7/8 x 35 5/8	12	115/60/1	4	380W/0.51HP	5-15P	296	51 1/2 x 33 3/8 x 39
CUC60-2D	1 &2	61 1/8 x 29 7/8 x 35 5/8	15	115/60/1	4	380W/0.51HP	5-15P	358	64 1/2 x 33 3/8 x 39
CUC60-4D	0&4	61 1/8 x 29 7/8 x 35 5/8	15	115/60/1	4	380W/0.51HP	5-15P	379	64 1/2 x 33 3/8 x 39
CUC72-2D	2&2	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	400W/0.54HP	5-15P	415	75 x 33 3/8 x 39
CUC72-4D	1 &4	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	400W/0.54HP	5-15P	432	75 x 33 3/8 x 39
CUC72-6D	0&6	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	400W/0.54HP	5-15P	430	75 x 33 3/8 x 39

If the data and structure update, without notice, subject to material object.


Under Counter Freezer With Drawer



www.sub-equip.com






Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

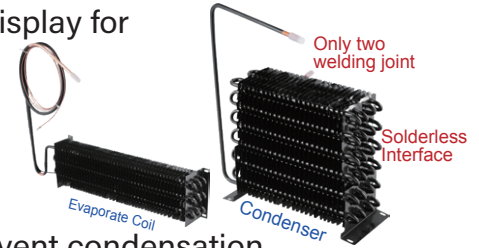

Temperature

- Interior temperature range: -17°C to -23°C (0°F to -10°F)
- Ambient temperature upto 45°C (113°F)

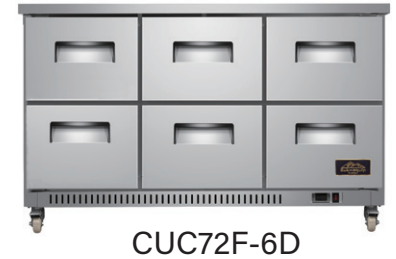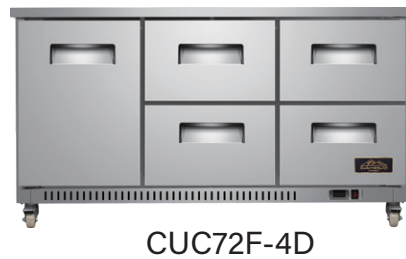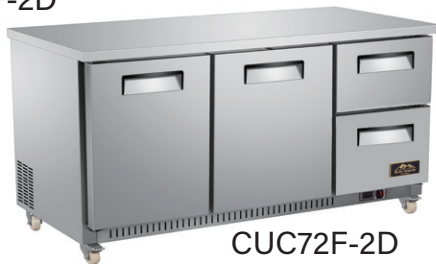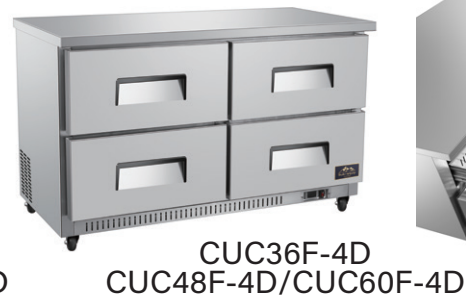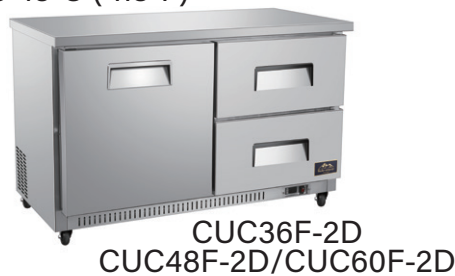

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUC27F-2D	0&2	27 3/4 x 29 7/8 x 35 5/8	6.5	115/60/1	3	250W/0.34HP	5-15P	232	32 1/8 x 33 3/8 x 39
CUC36F-2D	1 &2	36 1/4 x 29 7/8 x 35 5/8	9	115/60/1	3	300W/0.41HP	5-15P	263	39 1/2 x 33 3/8 x 39
CUC36F-4D	0&4	36 1/4 x 29 7/8 x 35 5/8	9	115/60/1	3	300W/0.41HP	5-15P	296	39 1/2 x 33 3/8 x 39
CUC48F-2D	1 &2	48 1/4 x 29 7/8 x 35 5/8	12	115/60/1	4	380W/0.51HP	5-15P	294	51 1/2 x 33 3/8 x 39
CUC48F-4D	0&4	48 1/4 x 29 7/8 x 35 5/8	12	115/60/1	4	380W/0.51HP	5-15P	298	51 1/2 x 33 3/8 x 39
CUC60F-2D	1 &2	61 1/8 x 29 7/8 x 35 5/8	15	115/60/1	4	450W/0.61HP	5-15P	362	64 1/2 x 33 3/8 x 39
CUC60F-4D	0&4	61 1/8 x 29 7/8 x 35 5/8	15	115/60/1	4	450W/0.61HP	5-15P	384	64 1/2 x 33 3/8 x 39
CUC72F-2D	2&2	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	500W/0.67HP	5-15P	416	75 x 33 3/8 x 39
CUC72F-4D	1 &4	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	500W/0.67HP	5-15P	435	75 x 33 3/8 x 39
CUC72F-6D	0&6	71 3/4 x 29 7/8 x 35 5/8	18	115/60/1	4.5	500W/0.67HP	5-15P	452	75 x 33 3/8 x 39



If the data and structure update, without notice, subject to material object.

Under Counter Refrigerator


With Side Mounted Compressor



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

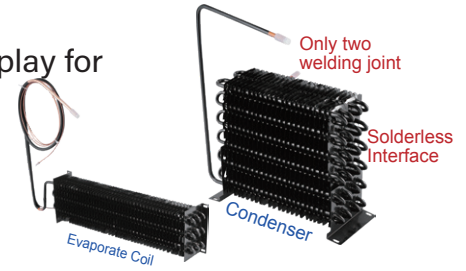

Temperature

- Interior temperature range: 1°C to 5°C (33°F to 45°F)
- Ambient temperature upto 45°C (113°F)



CUSC-48



CUSC-60/CUSC-72



CUSC-84/CUSC-96

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48	1	48 x 31 1/2 x 35 1/2	2	115/60/1	4	380W/0.51 HP	9.5	5-15P	283	51 3/8 x 35 1/4 x 39 1/4
CUSC-60	2	60 x 31 1/2 x 35 1/2	2	115/60/1	4.5	400W/0.54 HP	14.2	5-15P	340	63 1/2 x 35 1/4 x 39 1/4
CUSC-72	2	72 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	19	5-15P	408	75 1/2 x 35 1/4 x 39 1/4
CUSC-84	3	84 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	23.4	5-15P	461	87 1/2 x 35 1/4 x 39 1/4
CUSC-96	3	96 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.60 HP	27.7	5-15P	496	99 1/2 x 35 1/4 x 39 1/4



If the data and structure update, without notice, subject to material object.

Under Counter Freezer


With Side Mounted Compressor



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

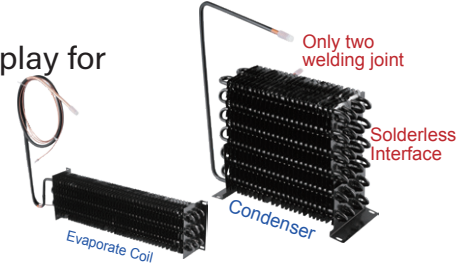

Temperature

- Interior temperature range: -17°C to -23°C (0°F to -10°F)
- Ambient temperature upto 45°C (113°F)



CUSC-48F



CUSC-60F/CUSC-72F



CUSC-84F/CUSC-96F

Specifications

Model	Doors	Ext. Dimensions W x D x H (in)	Shelves	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48F	1	48 x 31 1/2 x 35 1/2	2	115/60/1	4	380W/0.51 HP	9.5	5-15P	288	51 3/8 x 35 1/4 x 39 1/4
CUSC-60F	2	60 x 31 1/2 x 35 1/2	2	115/60/1	5	450W/0.61 HP	14.2	5-15P	346	63 1/2 x 35 1/4 x 39 1/4
CUSC-72F	2	72 x 31 1/2 x 35 1/2	2	115/60/1	5.5	500W/0.67 HP	19	5-15P	410	75 1/2 x 35 1/4 x 39 1/4
CUSC-84F	3	84 x 31 1/2 x 35 1/2	2	115/60/1	7.5	600W/0.81 HP	23.4	5-15P	463	87 1/2 x 35 1/4 x 39 1/4
CUSC-96F	3	96 x 31 1/2 x 35 1/2	2	115/60/1	7.5	600W/0.81 HP	27.7	5-15P	501	99 1/2 x 35 1/4 x 39 1/4



If the data and structure update, without notice, subject to material object.

Under Counter Refrigerator


With Side Mounted Compressor & Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

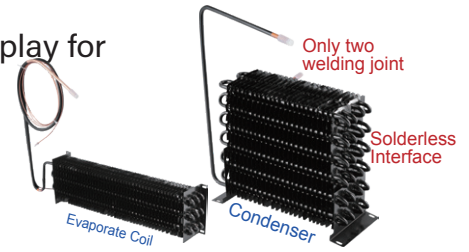

Temperature

- Interior temperature range: 1°C to 5°C (33°F to 45°F)
- Ambient temperature upto 45°C (113°F)



CUSC-48-2D



CUSC-60-2D
CUSC-72-2D



CUSC-84-2D
CUSC-96-2D



CUSC-60-4D
CUSC-72-4D



CUSC-84-4D
CUSC-96-4D



CUSC-84-6D
CUSC-96-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu.ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48-2D	0&2	48 x 31 1/2 x 35 1/2	115/60/1	4	380W/0.51 HP	9.5	5-15P	316	51 3/8 x 35 1/4 x 39 1/4
CUSC-60-2D	1 &2	60 x 31 1/2 x 35 1/2	115/60/1	4.5	400W/0.54 HP	14.2	5-15P	373	63 5/8 x 35 1/4 x 39 1/4
CUSC-60-4D	0&4	60 x 31 1/2 x 35 1/2	115/60/1	4.5	400W/0.54 HP	14.2	5-15P	406	63 5/8 x 35 1/4 x 39 1/4
CUSC-72-2D	1 &2	72 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	19.1	5-15P	441	76 5/8 x35 1/4 x 39 1/4
CUSC-72-4D	0&4	72 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	19.1	5-15P	474	76 5/8 x 35 1/4 x 39 1/4
CUSC-84-2D	2&2	84 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	23.4	5-15P	494	88 5/8 x 35 1/4 x 39 1/4
CUSC-84-4D	1 &4	84 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	23.4	5-15P	527	88 5/8 x 35 1/4 x 39 1/4
CUSC-84-6D	0&6	84 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	23.4	5-15P	560	88 5/8 x 35 1/4 x 39 1/4
CUSC-96-2D	2&2	96 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	27.7	5-15P	529	99 5/8 x 35 1/4 x 39 1/4
CUSC-96-4D	1 &4	96 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	27.7	5-15P	563	99 5/8 x 35 1/4 x 39 1/4
CUSC-96-6D	0&6	96 x 31 1/2 x 35 1/2	115/60/1	5	450W/0.60 HP	27.7	5-15P	596	99 5/8 x 35 1/4 x 39 1/4



If the data and structure update, without notice, subject to material object.

Under Counter Freezer


With Side Mounted Compressor & Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

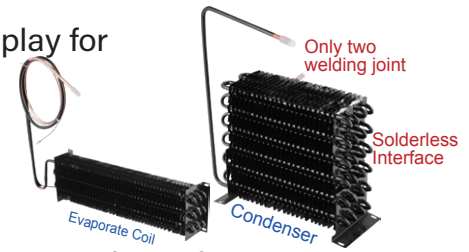

Temperature

- Interior temperature range: -17°C to -23°C (0°F to -10°F)
- Ambient temperature upto 45°C (113°F)



CUSC-48F-2D



CUSC-84F-2D
CUSC-96F-2D



CUSC-84F-4D
CUSC-96F-4D



CUSC-60F-2D
CUSC-72F-2D



CUSC-60F-4D
CUSC-72F-4D



CUSC-84F-6D
CUSC-96F-6D

Specifications

Model	Doors & Drawers	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48F-2D	0&2	48 x 31 1/2 x 35 1/2	115/60/1	4	380W/0.51 HP	9.5	5-15P	320	51 3/8 x 35 1/4 x 39 1/4
CUSC-60F-2D	1 &2	60 x 31 1/2 x 35 1/2	115/60/1	4.5	450W/0.61 HP	14.2	5-15P	370	63 5/8 x 35 1/4 x 39 1/4
CUSC-60F-4D	0&4	60 x 31 1/2 x 35 1/2	115/60/1	4.5	450W/0.61 HP	14.2	5-15P	410	63 5/8 x 35 1/4 x 39 1/4
CUSC-72F-2D	1 &2	72 x 31 1/2 x 35 1/2	115/60/1	5	500W/0.67 HP	19.1	5-15P	445	76 5/8 x 35 1/4 x 39 1/4
CUSC-72F-4D	0&4	72 x 31 1/2 x 35 1/2	115/60/1	5	500W/0.67 HP	19.1	5-15P	480	76 5/8 x 35 1/4 x 39 1/4
CUSC-84F-2D	2&2	84 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	23.4	5-15P	499	88 5/8 x 35 1/4 x 39 1/4
CUSC-84F-4D	1 &4	84 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	23.4	5-15P	531	88 5/8 x 35 1/4 x 39 1/4
CUSC-84F-6D	0&6	84 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	23.4	5-15P	564	88 5/8 x 35 1/4 x 39 1/4
CUSC-96F-2D	2&2	96 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	27.7	5-15P	533	99 5/8 x 35 1/4 x 39 1/4
CUSC-96F-4D	1 &4	96 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	27.7	5-15P	567	99 5/8 x 35 1/4 x 39 1/4
CUSC-96F-6D	0&6	96 x 31 1/2 x 35 1/2	115/60/1	5	600W/0.81 HP	27.7	5-15P	601	99 5/8 x 35 1/4 x 39 1/4



If the data and structure update, without notice, subject to material object.

Chef Base Refrigerator




www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

Temperature

- Interior temperature range: 1°C to 6°C (33°F to 45°F)
- Ambient temperature upto 45°C (113°F)

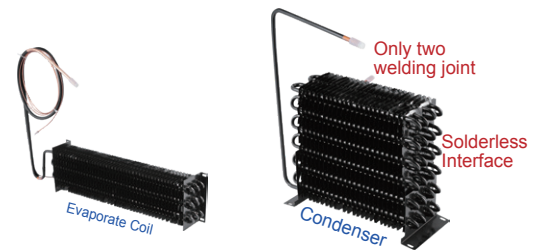

CCB-36-2D/CCB-48-2D/CCB-60-2D



CCB-60-4D/CCB-72-4D



CCB-84-6D/CCB-96-6D

Specifications

Model	Drawers	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CCB-36-2D	2	36 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	7.5	5-15P	276	38 7/8 x 37 1/4 x 30 1/2
CCB-48-2D	2	48 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	10.3	5-15P	342	50 7/8 x 37 1/4 x 30 1/2
CCB-60-2D	2	60 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	12.9	5-15P	397	62 3/4 x 37 1/4 x 30 1/2
CCB-60-4D	4	60 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	12.9	5-15P	427	62 3/4 x 37 1/4 x 30 1/2
CCB-72-4D	4	72 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	15.4	5-15P	441	74 3/4 x 37 1/4 x 30 1/2
CCB-84-6D	4	84 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	17	5-15P	507	86 3/4 x 37 1/4 x 30 1/2
CCB-96-6D	4	96 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	20.5	5-15P	574	98 3/4 x 37 1/4 x 30 1/2



If the data and structure update, without notice, subject to material object.

Chef Base Freezer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

Temperature

- Interior temperature range: -17°C to -23°C (0°F to -10°F)
- Ambient temperature upto 45°C (113°F)



CCB-36F-2D/CCB-48F-2D/CCB-60F-2D

CCB-60F-4D/CCB-72F-4D

CCB-84F-6D/CCB-96F-6D

Specifications

Model	Drawers	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu./ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CCB-36F-2D	2	36 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	7.5	5-15P	276	38 7/8 x 37 1/4 x 30 1/2
CCB-48F-2D	2	48 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	10.3	5-15P	342	50 7/8 x 37 1/4 x 30 1/2
CCB-60F-2D	2	60 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	12.9	5-15P	397	62 3/4 x 37 1/4 x 30 1/2
CCB-60F-4D	4	60 x 31 1/2 x 22 1/2	115/60/1	3	300W/0.40 HP	12.9	5-15P	427	62 3/4 x 37 1/4 x 30 1/2
CCB-72F-4D	4	72 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	15.4	5-15P	441	74 3/4 x 37 1/4 x 30 1/2
CCB-84F-6D	4	84 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	17	5-15P	507	86 3/4 x 37 1/4 x 30 1/2
CCB-96F-6D	4	96 x 31 1/2 x 22 1/2	115/60/1	4	380W/0.51 HP	20.5	5-15P	574	98 3/4 x 37 1/4 x 30 1/2



If the data and structure update, without notice, subject to material object.


Pizza Prep Table Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/3 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

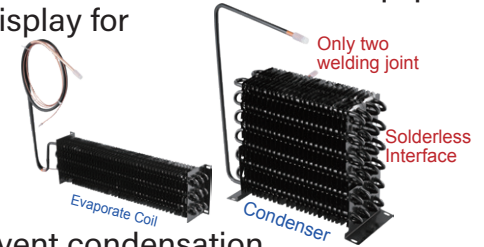

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CPP-44



CPP-67



CPP-93

Specifications

Model	Doors & Drawers	1/3 Size Pans	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CPP-44	1 & 0	6	48 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	4	380W/0.51HP	5-15P	372	51 1/4 x 37 1/4 x 46 1/2
CPP-44-2D	0 & 2	6	48 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	4	380W/0.51HP	5-15P	372	51 1/4 x 37 1/4 x 46 1/2
CPP-67	2 & 0	9	72 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	440W/0.59HP	5-15P	403	75 1/4 x 37 1/4 x 46 1/2
CPP-67-2D	1 & 2	9	72 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	440W/0.59HP	5-15P	447	75 1/4 x 37 1/4 x 46 1/2
CPP-67-4D	0 & 4	9	72 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	440W/0.59HP	5-15P	492	75 1/4 x 37 1/4 x 46 1/2
CPP-93	3 & 0	12	96 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	500W/0.67HP	5-15P	470	99 1/4 x 37 1/4 x 46 1/2
CPP-93-2D	1 & 2	12	96 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	500W/0.67HP	5-15P	503	99 1/4 x 37 1/4 x 46 1/2
CPP-93-4D	2 & 4	12	96 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	500W/0.67HP	5-15P	536	99 1/4 x 37 1/4 x 46 1/2
CPP-93-6D	0 & 6	12	96 x 35 3/8 x 37 1/4 (43 1/4)	115/60/1	5.3	500W/0.67HP	5-15P	569	99 1/4 x 37 1/4 x 46 1/2



If the data and structure update, without notice, subject to material object.

Pizza Prep Table Refrigerator



www.sub-equip.com



CPP-44-2D



CPP-93-2D



CPP-67-2D



CPP-93-4D



CPP-67-4D



CPP-93-6D



Natural Refrigerant

If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table


Regular Top Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

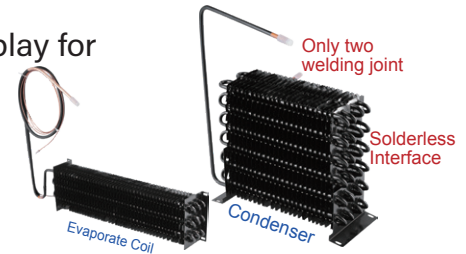

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)




CSSU-29



CSSU-36



CSSU-48/ CSSU-60

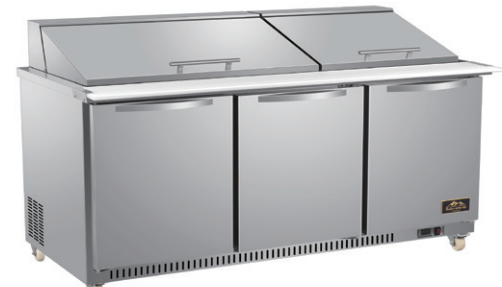

CSSU-72



Specifications

Model	1/6 Size Doors	1/6 Size Pan	Ext. Dimensions W x D x H (in)	Int. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-29	1	8	29 x 31 7/8 x 35 5/8 (42 1/2)	25 1/8 x 24 3/8 x 24	115/60/1	3	250W/0.34HP	7.5	5-15	223	32 1/8 x 33 1/3 x 45 7/8
CSSU-36	2	10	36 1/4 x 31 7/8 x 35 5/8 (42 1/2)	32 1/4 x 24 3/8 x 24	115/60/1	3	300W/0.40HP	11	5-15	243	39 2/5 x 33 1/3 x 45 7/8
CSSU-48	2	12	48 1/4 x 31 7/8 x 35 5/8 (42 1/2)	42 7/8 x 24 3/8 x 24	115/60/1	4	380W/0.51HP	12.5	5-15	287	51 1/2 x 33 1/3 x 45 7/8
CSSU-60	2	16	61 1/8 x 31 7/8 x 35 5/8 (42 1/2)	55 7/8 x 24 3/8 x 24	115/60/1	4.5	400W/0.54HP	16	5-15	393	64 2/5 x 33 1/3 x 45 7/8
CSSU-72	3	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	66 3/8 x 24 3/8 x 24	115/60/1	4.5	400W/0.54HP	19	5-15	472	75 x 33 1/3 x 45 7/8



Natural Refrigerant

If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table


Regular Top Refrigerator With Drawer



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

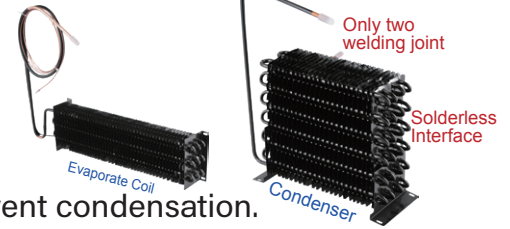

Temperature

-Interior temperature range: 1°C to 4°C (33°F to 40°F)



CSSU-29-2D



CSSU-36-2D
CSSU-48-2D
CSSU-60-2D



CSSU-36-4D
CSSU-48-4D
CSSU-60-4D



CSSU-72-2D



CSSU-72-4D



CSSU-72-6D

Specifications

Model	Doors & Drawers	1/6 Size Pans	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-29-2D	0&2	8	29 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	250W/0.34HP	7.5	5-15	255	32 1/8 x 33 3/8 x 45 7/8
CSSU-36-2D	1 &2	10	36 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11	5-15	274	39 1/2 x 33 3/8 x 45 7/8
CSSU-36-4D	0&4	10	36 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11	5-15	307	39 1/2 x 33 3/8 x 45 7/8
CSSU-48-2D	1 &2	12	48 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	12.5	5-15	319	51 1/2 x 33 3/8 x 45 7/8
CSSU-48-4D	0&4	12	48 1/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	12.5	5-15	351	51 1/2 x 33 3/8 x 45 7/8
CSSU-60-2D	1 &2	16	61 1/8 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	16	5-15	425	64 1/2 x 33 3/8 x 45 7/8
CSSU-60-4D	0&4	16	61 1/8 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	16	5-15	457	64 1/2 x 33 3/8 x 45 7/8
CSSU-72-2D	2&2	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	504	75 x 33 3/8 x 45 7/8
CSSU-72-4D	1 &4	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	536	75 x 33 3/8 x 45 7/8
CSSU-72-6D	0&6	20	71 3/4 x 31 7/8 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	19	5-15	572	75 x 33 3/8 x 45 7/8



If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table

Mega Top Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



Specifications

Model	1/6 Size Doors	1/6 Size Pans	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-29M	1	12	29 x 36 1/2 x 35 5/8 (42 1/2)	25 1/8 x 27 5/8 x 24 3/8	115/60/1	3	250W/0.34HP	8.5	5-15	245	32 1/8 x 37 1/4 x 47 5/8
CSSU-36M	2	15	36 1/4 x 36 1/2 x 35 5/8 (42 1/2)	32 1/4 x 27 5/8 x 24 3/8	115/60/1	3	300W/0.40HP	11.5	5-15	291	39 1/2 x 37 1/4 x 47 5/8
CSSU-48M	2	18	48 1/4 x 36 1/2 x 35 5/8 (42 1/2)	42 7/8 x 27 5/8 x 24 3/8	115/60/1	4	380W/0.51HP	15	5-15	320	51 1/2 x 37 1/4 x 47 5/8
CSSU-60M	2	24	61 1/8 x 36 1/2 x 35 5/8 (42 1/2)	55 7/8 x 27 5/8 x 24 3/8	115/60/1	4.5	400W/0.54HP	20	5-15	389	64 1/2 x 37 1/4 x 47 5/8
CSSU-72M	3	30	71 3/4 x 36 1/2 x 35 5/8 (42 1/2)	66 3/8 x 27 5/8 x 24 3/8	115/60/1	4.5	400W/0.54HP	23	5-15	451	75 x 37 1/4 x 47 5/8



If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table


Mega Top Refrigerator With Drawers



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

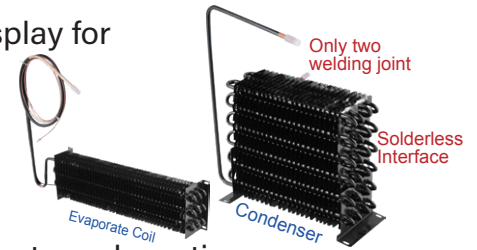

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CSSU-29M-2D



CSSU-36M-2D
CSSU-48M-2D
CSSU-60M-2D



CSSU-36M-4D
CSSU-48M-4D
CSSU-60M-4D



CSSU-72M-2D



CSSU-72M-4D



CSSU-72M-6D

Specifications

Model	Doors & Drawers	1/6 Size Pans	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-29M-2D	0&2	12	29 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	3	250W/0.34HP	8.5	5-15	278	32 1/8 x 37 1/4 x 47 5/8
CSSU-36M-2D	2&2	15	36 1/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11.5	5-15	322	39 1/2 x 37 1/4 x 47 5/8
CSSU-36M-4D	0&4	15	36 1/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	3	300W/0.40HP	11.5	5-15	355	39 1/2 x 37 1/4 x 47 5/8
CSSU-48M-2D	1 &2	18	48 1/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	15	5-15	352	51 1/2 x 37 1/4 x 47 5/8
CSSU-48M-4D	0&4	18	48 1/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4	380W/0.51HP	15	5-15	385	51 1/2 x 37 1/4 x 47 5/8
CSSU-60M-2D	2&2	24	61 1/8 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	20	5-15	424	64 1/2 x 37 1/4 x 47 5/8
CSSU-60M-4D	0&4	24	61 1/8 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	20	5-15	455	64 1/2 x 37 1/4 x 47 5/8
CSSU-72M-2D	2&2	30	71 3/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	23	5-15	485	75 x 37 1/4 x 47 5/8
CSSU-72M-4D	1 &4	30	71 3/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	23	5-15	518	75 x 37 1/4 x 47 5/8
CSSU-72M-6D	0&6	30	71 3/4 x 36 1/2 x 35 5/8 (42 1/2)	115/60/1	4.5	400W/0.54HP	23	5-15	551	75 x 37 1/4 x 47 5/8



If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table


Regular Top Refrigerator With Side Mounted Compressor



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

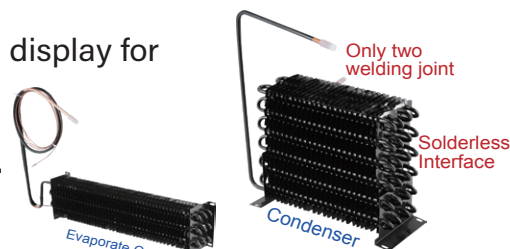

Temperature

-Interior temperature range: 1°C to 4°C (33°F to 40°F)



CUSC-48R



CUSC-60R



CUSC-72R/CUSC-84R/CUSC-96R



Specifications

Model	Doors	1/6 Size Pan	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48R	1	12	48 x 33 x 35 5/8 (42 1/2)	9.5	115/60/1	4	380W/0.51HP	5-15	298	51 1/2 x 35 7/8 x 45 7/8
CUSC-60R	2	16	60 x 33 x 35 5/8 (42 1/2)	14	115/60/1	4.3	400W/0.54HP	5-15	386	63 1/2 x 35 7/8 x 45 7/8
CUSC-72R	3	20	72 x 33 x 35 5/8 (42 1/2)	18.5	115/60/1	5	450W/0.61HP	5-15	419	75 1/2 x 35 7/8 x 45 7/8
CUSC-84R	3	22	84 x 33 x 35 5/8 (42 1/2)	23	115/60/1	5	450W/0.61HP	5-15	474	87 1/2 x 35 7/8 x 45 7/8
CUSC-96R	3	26	96 x 33 x 35 5/8 (42 1/2)	27.5	115/60/1	5.5	500W/0.67HP	5-15	507	99 1/2 x 35 7/8 x 45 7/8



If the data and structure update, without notice, subject to material object.

Salad & Sandwich Prep Table


Megatop Refrigerator With Side Mounted Compressor



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Dispose of daily waste effortlessly with the stainless steel baseplate that lifts easily.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a removable plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

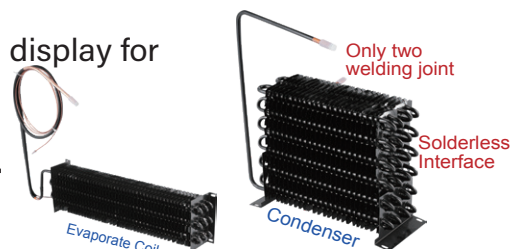

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CUSC-48M



CUSC-60M



CUSC-72M/CUSC-84M/CUSC-96M



Specifications

Model	Doors	1/6 Size Pan	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSC-48M	1	18	48 x 36 1/2 x 35 5/8 (42 1/2)	10.5	115/60/1	4	380W/0.51HP	5-15	331	51 1/2 x 37 1/4 x 47 3/4
CUSC-60M	2	24	60 x 36 1/2 x 35 5/8 (42 1/2)	16	115/60/1	4.3	400W/0.54HP	5-15	408	63 1/2 x 37 1/4 x 47 3/4
CUSC-72M	3	30	72 x 36 1/2 x 35 5/8 (42 1/2)	20.3	115/60/1	5	450W/0.61HP	5-15	441	75 1/2 x 37 1/4 x 47 3/4
CUSC-84M	3	33	84 x 36 1/2 x 35 5/8 (42 1/2)	25.5	115/60/1	5	450W/0.61HP	5-15	496	87 1/2 x 37 1/4 x 47 3/4
CUSC-96M	3	39	96 x 36 1/2 x 35 5/8 (42 1/2)	30.5	115/60/1	5.5	500W/0.67HP	5-15	529	99 1/2 x 37 1/4 x 47 3/4



If the data and structure update, without notice, subject to material object.


Workstation Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam insulation.
- Equipped with an electronic thermostat and digital LED temperature display for precise control and convenient reading.
- Features a self-closing swing door for added convenience.
- The magnetic gasket can be replaced without the need for any tools.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.



Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



Specifications

Model	Doors	1/6 Size Pan	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CUSS-60	3	5	60 1/8 x 32 1/2 x 39 1/2	115/60/1	4	380W/0.51HP	5-15	529.2	65 1/2 x 37 1/4 x 47 3/4
CUSS-72	3	6	72 1/8 x 32 1/2 x 39 1/2	115/60/1	4	380W/0.51HP	5-15	573.2	75 x 37 1/4 x 47 3/4
CUSS-84	3	7	84 x 32 1/2 x 39 1/2	115/60/1	5.3	450W/0.61HP	5-15	693.4	87 1/2 x 37 1/4 x 47 3/4
CUSS-96	3	9	96 x 32 1/2 x 39 1/2	115/60/1	5.3	450W/0.61HP	5-15	705.5	99 1/2 x 37 1/4 x 47 3/4



If the data and structure update, without notice, subject to material object.

Features

- CFC Refrigerant And Foam
- Ventilated Refrigeration Compartment.
- Danfoss Refrigeration Components.
- Aspera Or Danfoss Compressor.
- EBM Fan
- Complete Structure Interior & Exterior In Stainless Steel AISI 304
With Round Internal Edges For Easy Cleaning
- Choice Of Models From 3 Set GN1/1 (15.7" x 23.6") trays To 14 Set GN1/1 (15.7" x 23.6") trays
- Self Closing Doors With Easy To Clean And Replace Magnetic Balloon Gasket.
- Special Probe Feels The Temperature In The Heart Of The Product.
- 75mm thickness Insulation For Excellent Thermal Efficiency.
- Dixell Controller And Compact Footprints Optional.
- Electric Door Mullion Heater Replaceable.

Temperature

- The powerful Celfrost Professional Blast Refrigerator / Freezers are most ideal for reducing the temperature of cooked food from 90 °C to +3 °C (194°F to 37.4°F) or -18°C (0°F) rapidly, thereby rendering it safe from bacterial growth and fit for ensuing storage and consumption
- Ambient temperature up to 45°C (113°F)



CBF-5

CBF-10

Specifications

Model	Ext. Dimensions W x D x H (in)	Cooling Capacity		PAN (GN 1/1)	V/Hz/Ph	NEMA PLUG	Power	Ship Weight(lbs)	Ship Data W x D x H (in)
		70 °C to 3 °C in 90 mins	70 °C to -18 °C in 240 mins						
CBF-5	33 x 36 1/4 x 47 1/2	40LB	31LB	5	115/60/1	5-15	801W /1 HP	209	39 X 42 X 54
CBF-10	33 x 36 1/4 x 62 3/4	88LB	62LB	10	208/60/1	6-20	1298W/1.75HP	330	39 X 42 X 69



45°C / 113°F
AMBIENT
TEMPERATURE

If the data and structure update, without notice, subject to material object.

Blast Chiller/ Freezer



www.sub-equip.com




Blast Chillers +70°C To +3°C (158°F to 37.4°F)

The Blast Chilling Cycle, The Product Temperature Drops From +70°C To +3° C (158°F to 37.4°F) In 90 Minutes. The Transition Between +65°C And +10°C (149°F and 50°F) Ideal Climate For the Proliferation Of Bacterial, So Fast As To Prevent Any Generation. The Foodstuff Can Be Kept For 8 Days In Normally Chiller.



Shock Freezers +70°C To -18°C (158°F to 0°F)

The Maximum Storage Is Achieved Through The Rapid Production Of Cold To Allow The Production Of Microcrystals That Optimally Preserve The Cells Of The Foodstuff. The Shock Freezing Drops The Temperature From +70°C To -18°C (158°F to 0°F) In A Maximum Time Of 240 Minutes. The Food Is Quickly Frozen And Then Be Kept For Months In Normally Freezer.

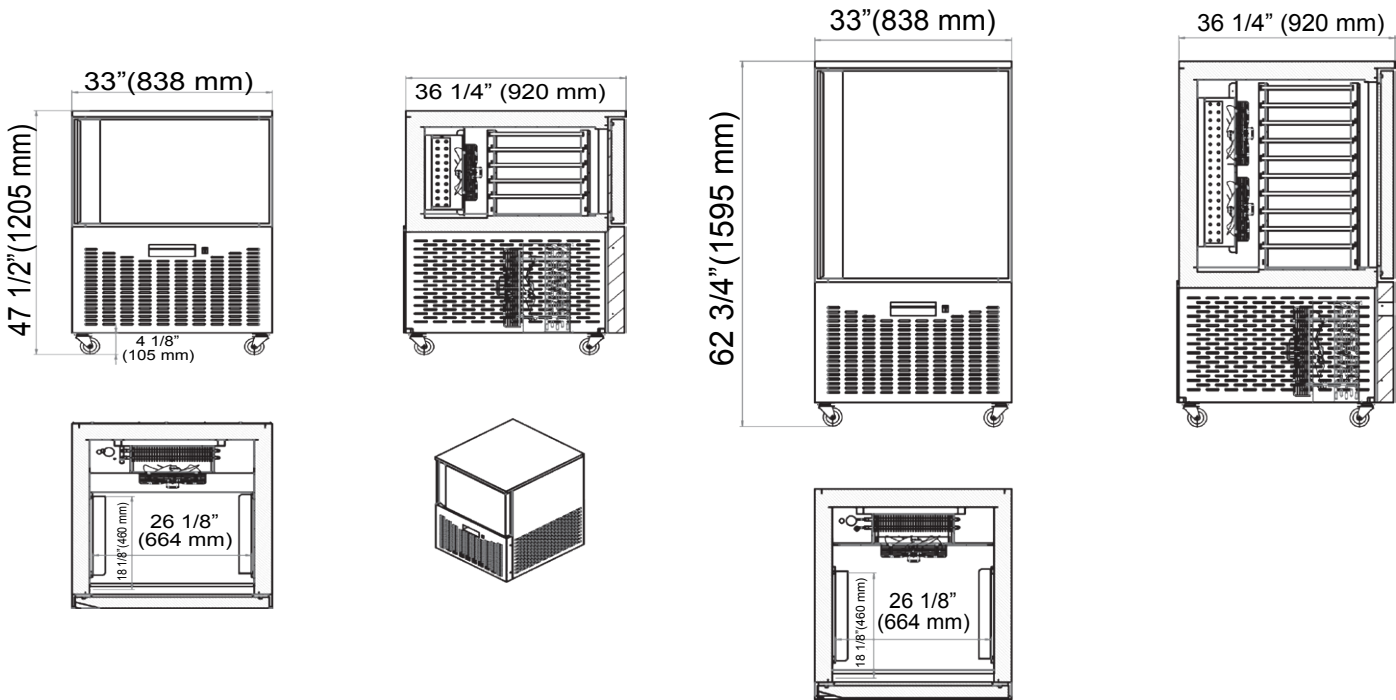

CBF-5

CBF-10



If the data and structure update, without notice, subject to material object.

Features

- Energy efficient Low-e triple Four sides right angle design, good insulation and display effect
- CFC Free Refrigerant And Foam
- Electronic Thermostat And Digital LED Temperature Display For Accurate Control And Easy Reading
- Adjustable heavy Duty Shelves and Concealed Refrigerated Drawers design
- LED Light For Better Display.
- Efficient electrothermal defogging
- With fan cooling system.
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- High quality marble base, stylish appearance, durable, easy to clean
- Easy to mount 3" casters (lockable in front) are standard with all units.
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- Dual Compressors & Dual Plug: FDC-79-4D,FDC-95-4D

Temperature

-Interior temperature range: 2°C to 8°C (36°F to 46°F)



Specifications

Model	Drawers	Ext. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
FDC-48-2D	2	47 1/4 x 31 1/2 x 53 1/2	115/60/1	17.03	1468W/1.97HP	5-15P	728	50 1/2 x 35 x 61
FDC-60-3D	3	59 x 31 1/2 x 53 1/2	115/60/1	17.36	1448W/1.94HP	5-15P	882	62 1/4 x 35 x 61
FDC-71-3D	3	70 7/8 x 31 1/2 x 53 1/2	115/60/1	17.81	1502W/2.01HP	5-15P	1036	74 x 35 x 61
FDC-79-4D	4	78 3/4 x 31 1/2 x 53 1/2	115/60/1	24.01	1912W/2.56HP	dual 5-15P	1191	82 x 35 x 61
FDC-95-4D	4	94 1/2 x 31 1/2 x 53 1/2	115/60/1	24.37	2000W/2.68HP	dual 5-15P	1323	97 3/4 x 35 x 61



If the data and structure update, without notice, subject to material object.


Pre Table With Sneeze Glass Refrigerator



www.sub-equip.com

Features

- CFC free refrigerant and foam
- Built-in 19" high sneeze guard constructed from tempered glass on 3 sides
- Stainless steel frame and flat top Comes with 1/6 size 4" deep pans and adapter bars
- Unit can accommodate pans that are 6" deep
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

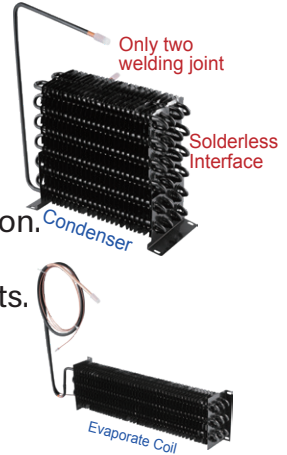

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CSSU-S60MG / CSSU-S72MG



CSSU-S84MG / CSSU-S96MG



Specifications

Model	Doors	1/6 Size Pans	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-S60MG	2	24	60 x 34 1/2 x 35 5/8 (54 5/8)	15.65	115/60/1	4.5	400W/0.54HP	5-15P	507	63 1/2 x 35 5/8 x 58
CSSU-S72MG	2	30	72 x 34 1/2 x 35 5/8 (54 5/8)	20.12	115/60/1	5	450W/0.61H	5-15P	607	75 1/2 x 35 5/8 x 58
CSSU-S84MG	3	36	84 x 34 1/2 x 35 5/8 (54 5/8)	25.49	115/60/1	5	450W/0.61HP	5-15P	772	87 1/2 x 35 5/8 x 58
CSSU-S96MG	3	42	96 x 34 1/2 x 35 5/8 (54 5/8)	30.34	115/60/1	5.5	500W/0.67HP	5-15P	838	99 3/8 x 35 5/8 x 58



If the data and structure update, without notice, subject to material object.


Pre Table With Sneeze Glass Refrigerator With Drawers



www.sub-equip.com

Features

- CFC free refrigerant and foam
- Built-in 19" high sneeze guard constructed from tempered glass on 3 sides
- Stainless steel frame and flat top Comes with 1/6 size 4" deep pans and adapter bars
- Unit can accommodate pans that are 6" deep
- Drawers are designed to fit a standard full size 1/1 pan.
- External construction comprises stainless steel framework.
- Internally constructed with 304 stainless steel.
- Incorporates auto defrosting and auto evaporation mechanisms to prevent condensation.
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints.
- The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options.
- Includes 1/6 size polycarbonate GN pans and a plastic cutting board.
- Comes with easy-to-mount 4" casters (front casters equipped with brakes), standard with all units.
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord.

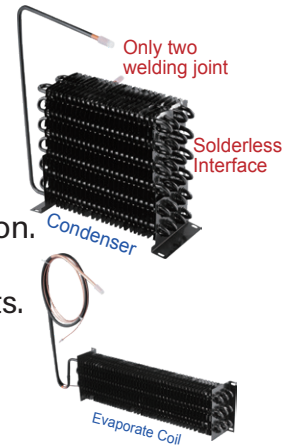

Temperature

- Interior temperature range: 1°C to 4°C (33°F to 40°F)



CSSU-S84MG-2D
CSSU-S96MG-2D



CSSU-S60MG-2D
CSSU-S72MG-2D



CSSU-S60MG-4D
CSSU-S72MG-4D



CSSU-S84MG-4D
CSSU-S96MG-4D



CSSU-S84MG-6D
CSSU-S96MG-6D

Specifications

Model	Doors & Drawers	1/6 Size Pans	Ext. Dimensions W x D x H (in)	Storage Capacity(cu-ft)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CSSU-S60MG-2D	1 & 2	24	60 x 34 1/2 x 35 5/8 (54 5/8)	15.65	115/60/1	4.5	400W/0.54HP	5-15P	507	63 1/2 x 35 5/8 x 58
CSSU-S60MG-4D	0 & 4	24	60 x 34 1/2 x 35 5/8 (54 5/8)	15.65	115/60/1	5	400W/0.54HP	5-15P	540	63 1/2 x 35 5/8 x 58
CSSU-S72MG-2D	1 & 2	30	72 x 34 1/2 x 35 5/8 (54 5/8)	20.12	115/60/1	5	450W/0.61HP	5-15P	607	75 1/2 x 35 5/8 x 58
CSSU-S72MG-4D	0 & 4	30	72 x 34 1/2 x 35 5/8 (54 5/8)	20.12	115/60/1	5	450W/0.61HP	5-15P	640	75 1/2 x 35 5/8 x 58
CSSU-S84MG-2D	2 & 2	36	84 x 34 1/2 x 35 5/8 (54 5/8)	25.49	115/60/1	5	450W/0.61HP	5-15P	706	87 1/2 x 35 5/8 x 58
CSSU-S84MG-4D	1 & 4	36	84 x 34 1/2 x 35 5/8 (54 5/8)	25.49	115/60/1	5	450W/0.61HP	5-15P	739	87 1/2 x 35 5/8 x 58
CSSU-S84MG-6D	0 & 6	36	84 x 34 1/2 x 35 5/8 (54 5/8)	25.49	115/60/1	5	450W/0.61HP	5-15P	772	87 1/2 x 35 5/8 x 58
CSSU-S96MG-2D	2 & 2	42	96 x 34 1/2 x 35 5/8 (54 5/8)	30.34	115/60/1	5.5	500W/0.67HP	5-15P	772	99 3/8 x 35 5/8 x 58
CSSU-S96MG-4D	1 & 4	42	96 x 34 1/2 x 35 5/8 (54 5/8)	30.34	115/60/1	5.5	500W/0.67HP	5-15P	805	99 3/8 x 35 5/8 x 58
CSSU-S96MG-6D	0 & 6	42	96 x 34 1/2 x 35 5/8 (54 5/8)	30.34	115/60/1	5.5	500W/0.67HP	5-15P	838	99 3/8 x 35 5/8 x 58



If the data and structure update, without notice, subject to material object.

Grab and Go Refrigerator

self-serve counter case



www.sub-equip.com

Features

- All-steel base construction with Stainless Steel exterior
- Easily accessible light and power switch
- Rear access to refrigeration system for quick and easy service
- Adjustable leg levelers
- On-Demand PTC condensate evaporator provided for a totally self-contained system
- Stainless Steel step riser
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 430 Stainless steel
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord

Temperature

- Interior temperature range: 2°C to 8°C (36°F to 46°F)



Specifications

Model	Type	Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
GNG-F30	square ends	30 x 34 x 33	115/60/1	9.82	786W/1.05HP	5-15P	287	33 1/2 x 38 1/4 x 40 7/8
GNG-F36	square ends	36 x 34 x 33	115/60/1	10.01	810W/1.09HP	5-15P	309	39 1/4 x 38 1/4 x 40 7/8
GNG-F50	square ends	50 x 34 x 33	115/60/1	10.74	880W/1.18HP	5-15P	353	53 x 38 1/4 x 40 7/8
GNG-F59	square ends	59 x 34 x 33	115/60/1	12.01	1078W/1.45HP	5-15P	397	62 1/4 x 38 1/4 x 40 7/8
GNG-F77	square ends	77 x 34 x 33	115/60/1	13.41	1123W/1.51HP	dual 5-15P	485	80 1/8 x 38 1/4 x 40 7/8



If the data and structure update, without notice, subject to material object.

Grab and Go Refrigerator

self-serve counter case



www.sub-equip.com

Features

- All-steel base construction with Stainless Steel exterior
- Easily accessible light and power switch
- Rear access to refrigeration system for quick and easy service
- Adjustable leg levelers
- On-Demand PTC condensate evaporator provided for a totally self-contained system
- Stainless Steel step riser
- Auto defrosting and auto evaporation to prevent condensation
- Condensation pan efficiently evaporates excess water
- INTERIOR: 304 Stainless steel
- EXTERIOR: 403 Stainless steel
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord

Temperature

- Interior temperature range: 2°C to 8°C (36°F to 46°F)



Specifications

Model	Type	Dimensions W x D x H (in)	V/Hz/Ph	AMPS	Power	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
GNG-C30	curved ends	30 x 34 x 33	115/60/1	9.26	601W/0.81HP	5-15P	287	33 1/2 x 38 1/4 x 40 7/8
GNG-C36	curved ends	36 x 34 x 33	115/60/1	9.65	750W/1.01HP	5-15P	309	39 1/4 x 38 1/4 x 40 7/8
GNG-C50	curved ends	50 x 34 x 33	115/60/1	10.02	820W/1.10HP	5-15P	353	53 x 38 1/4 x 40 7/8
GNG-C59	curved ends	59 x 34 x 33	115/60/1	11.34	1025W/1.37HP	5-15P	397	62 1/4 x 38 1/4 x 40 7/8
GNG-C77	curved ends	77 x 34 x 33	115/60/1	12.94	1098W/1.47HP	dual 5-15P	485	80 1/8 x 38 1/4 x 40 7/8



If the data and structure update, without notice, subject to material object.



Contact Us: info@sub-equip.com
sales@sub-equip.com

Canada: 3794 Victoria Park Ave. Toronto. Ontario. M2H 3H7

China: Unit 201, Building 2, No. 8 Science and Technology Eighth Road, Xingtan Industrial Zone,
Qixing Community, Xingtan Town, Shunde District, Foshan City, Guangdong Province, China

For a wider selection of products, kindly explore our website at
www.sub-equip.com

